















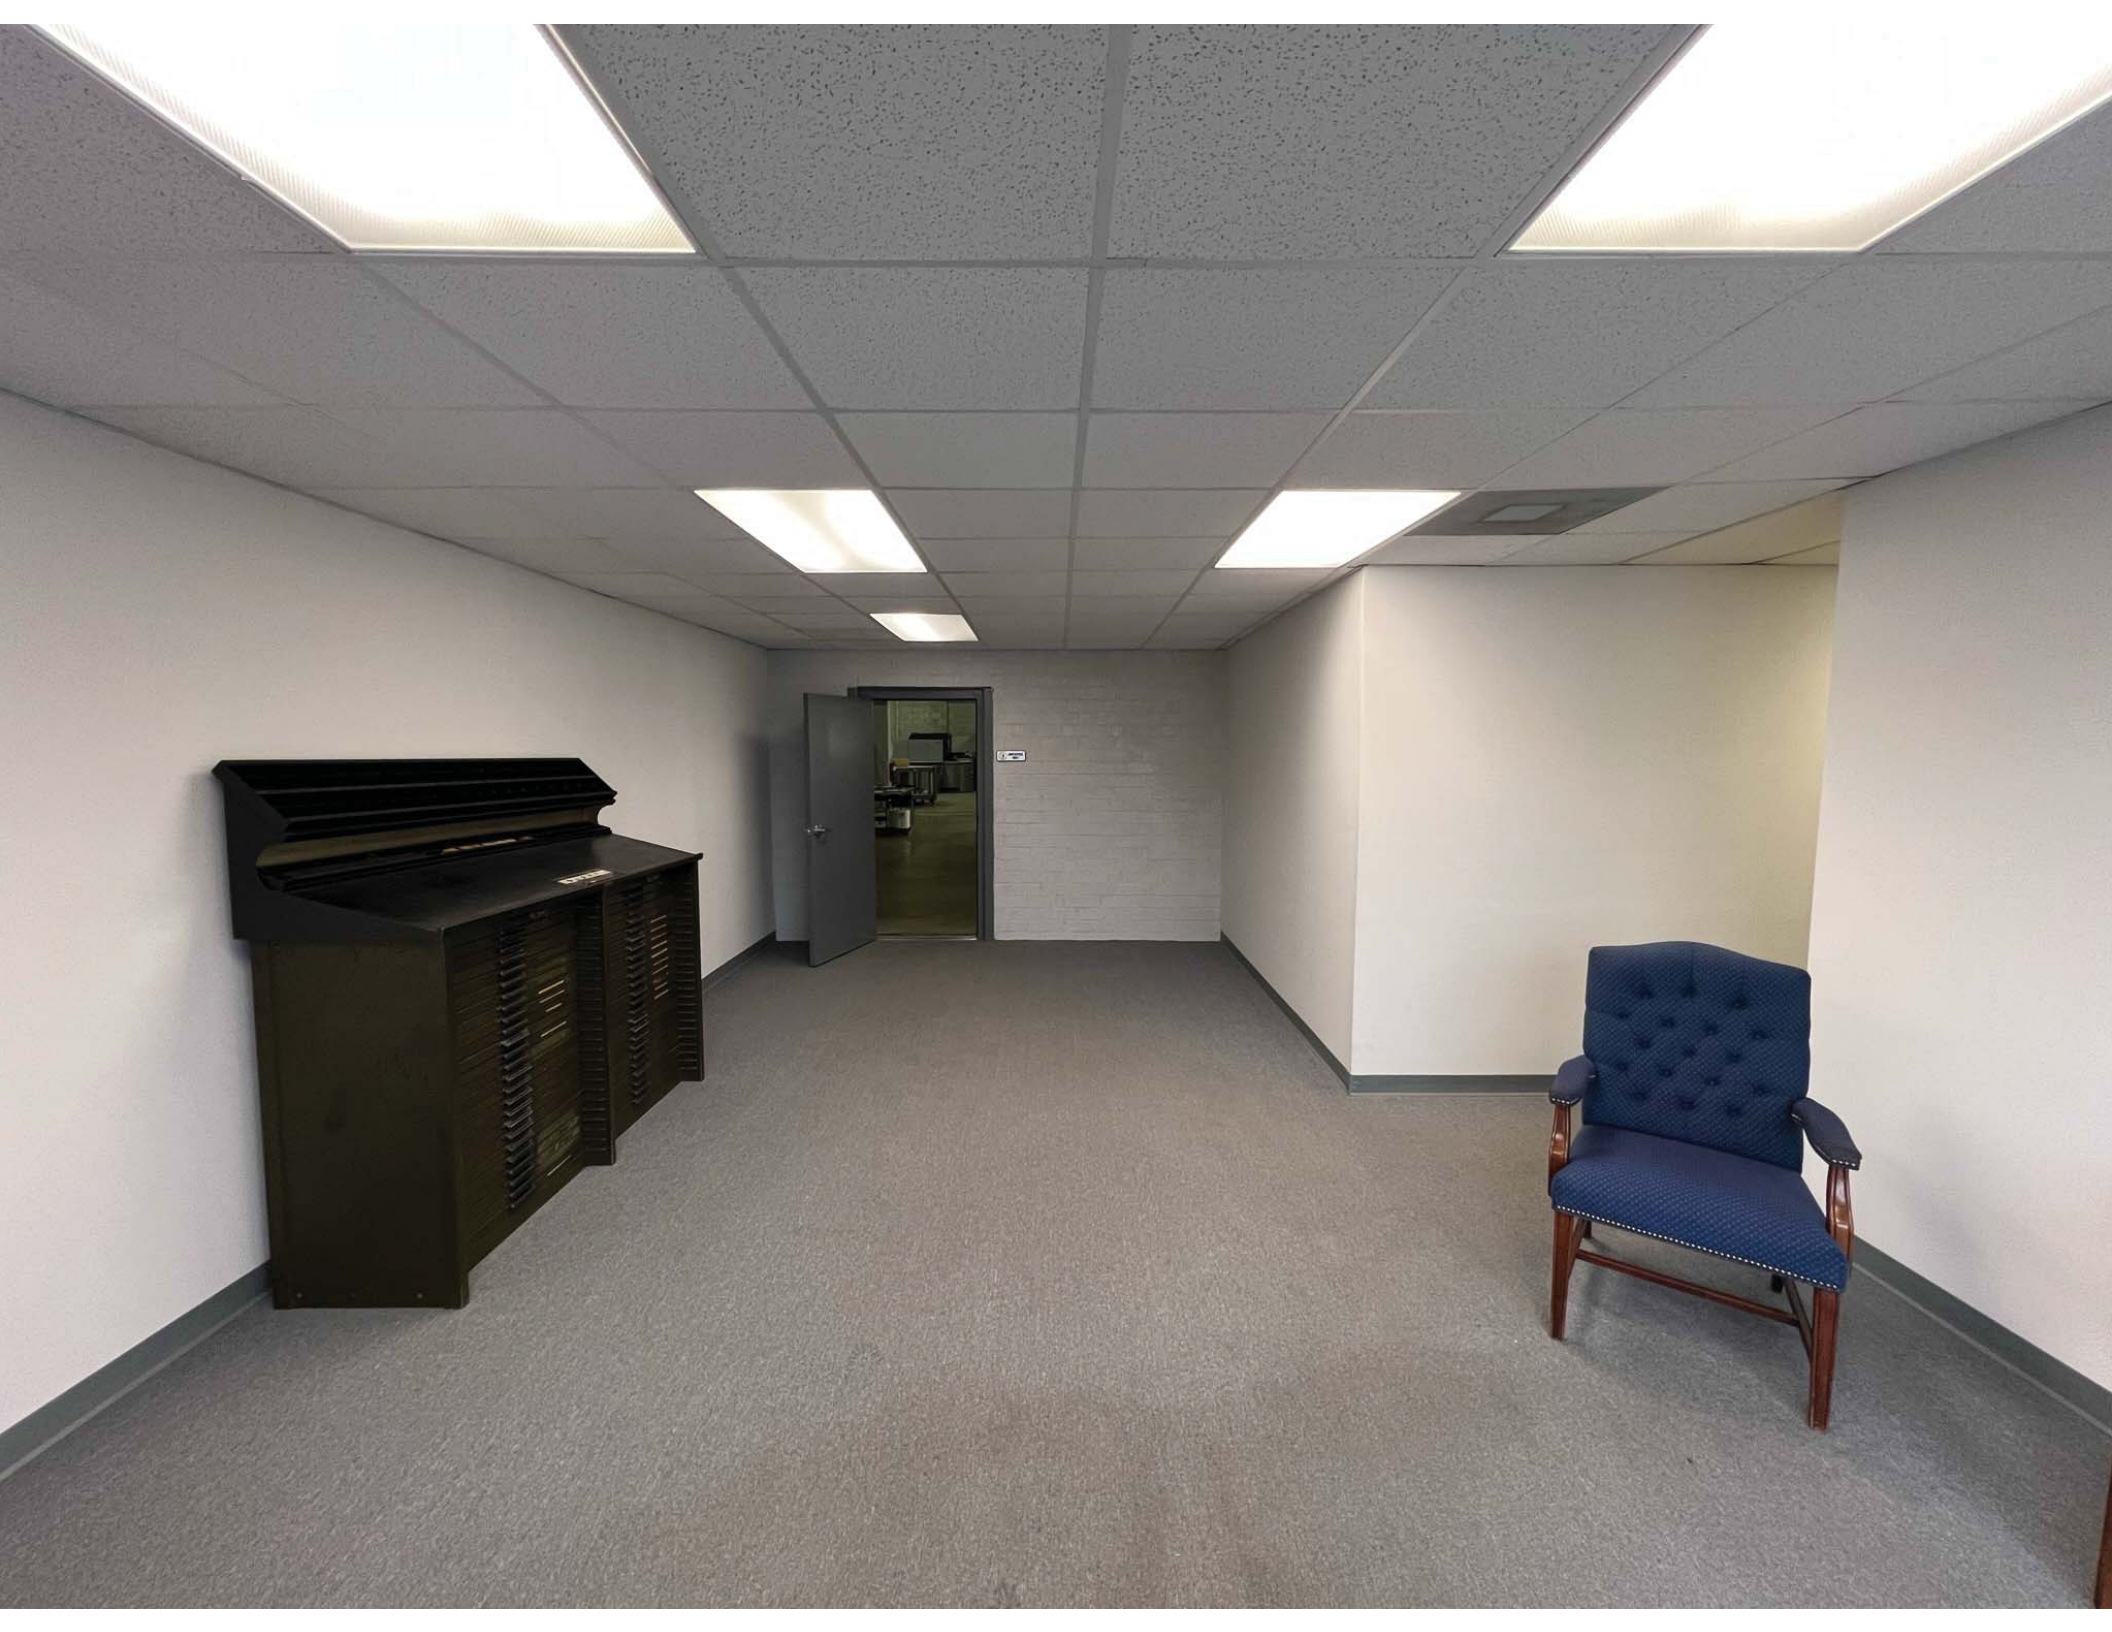








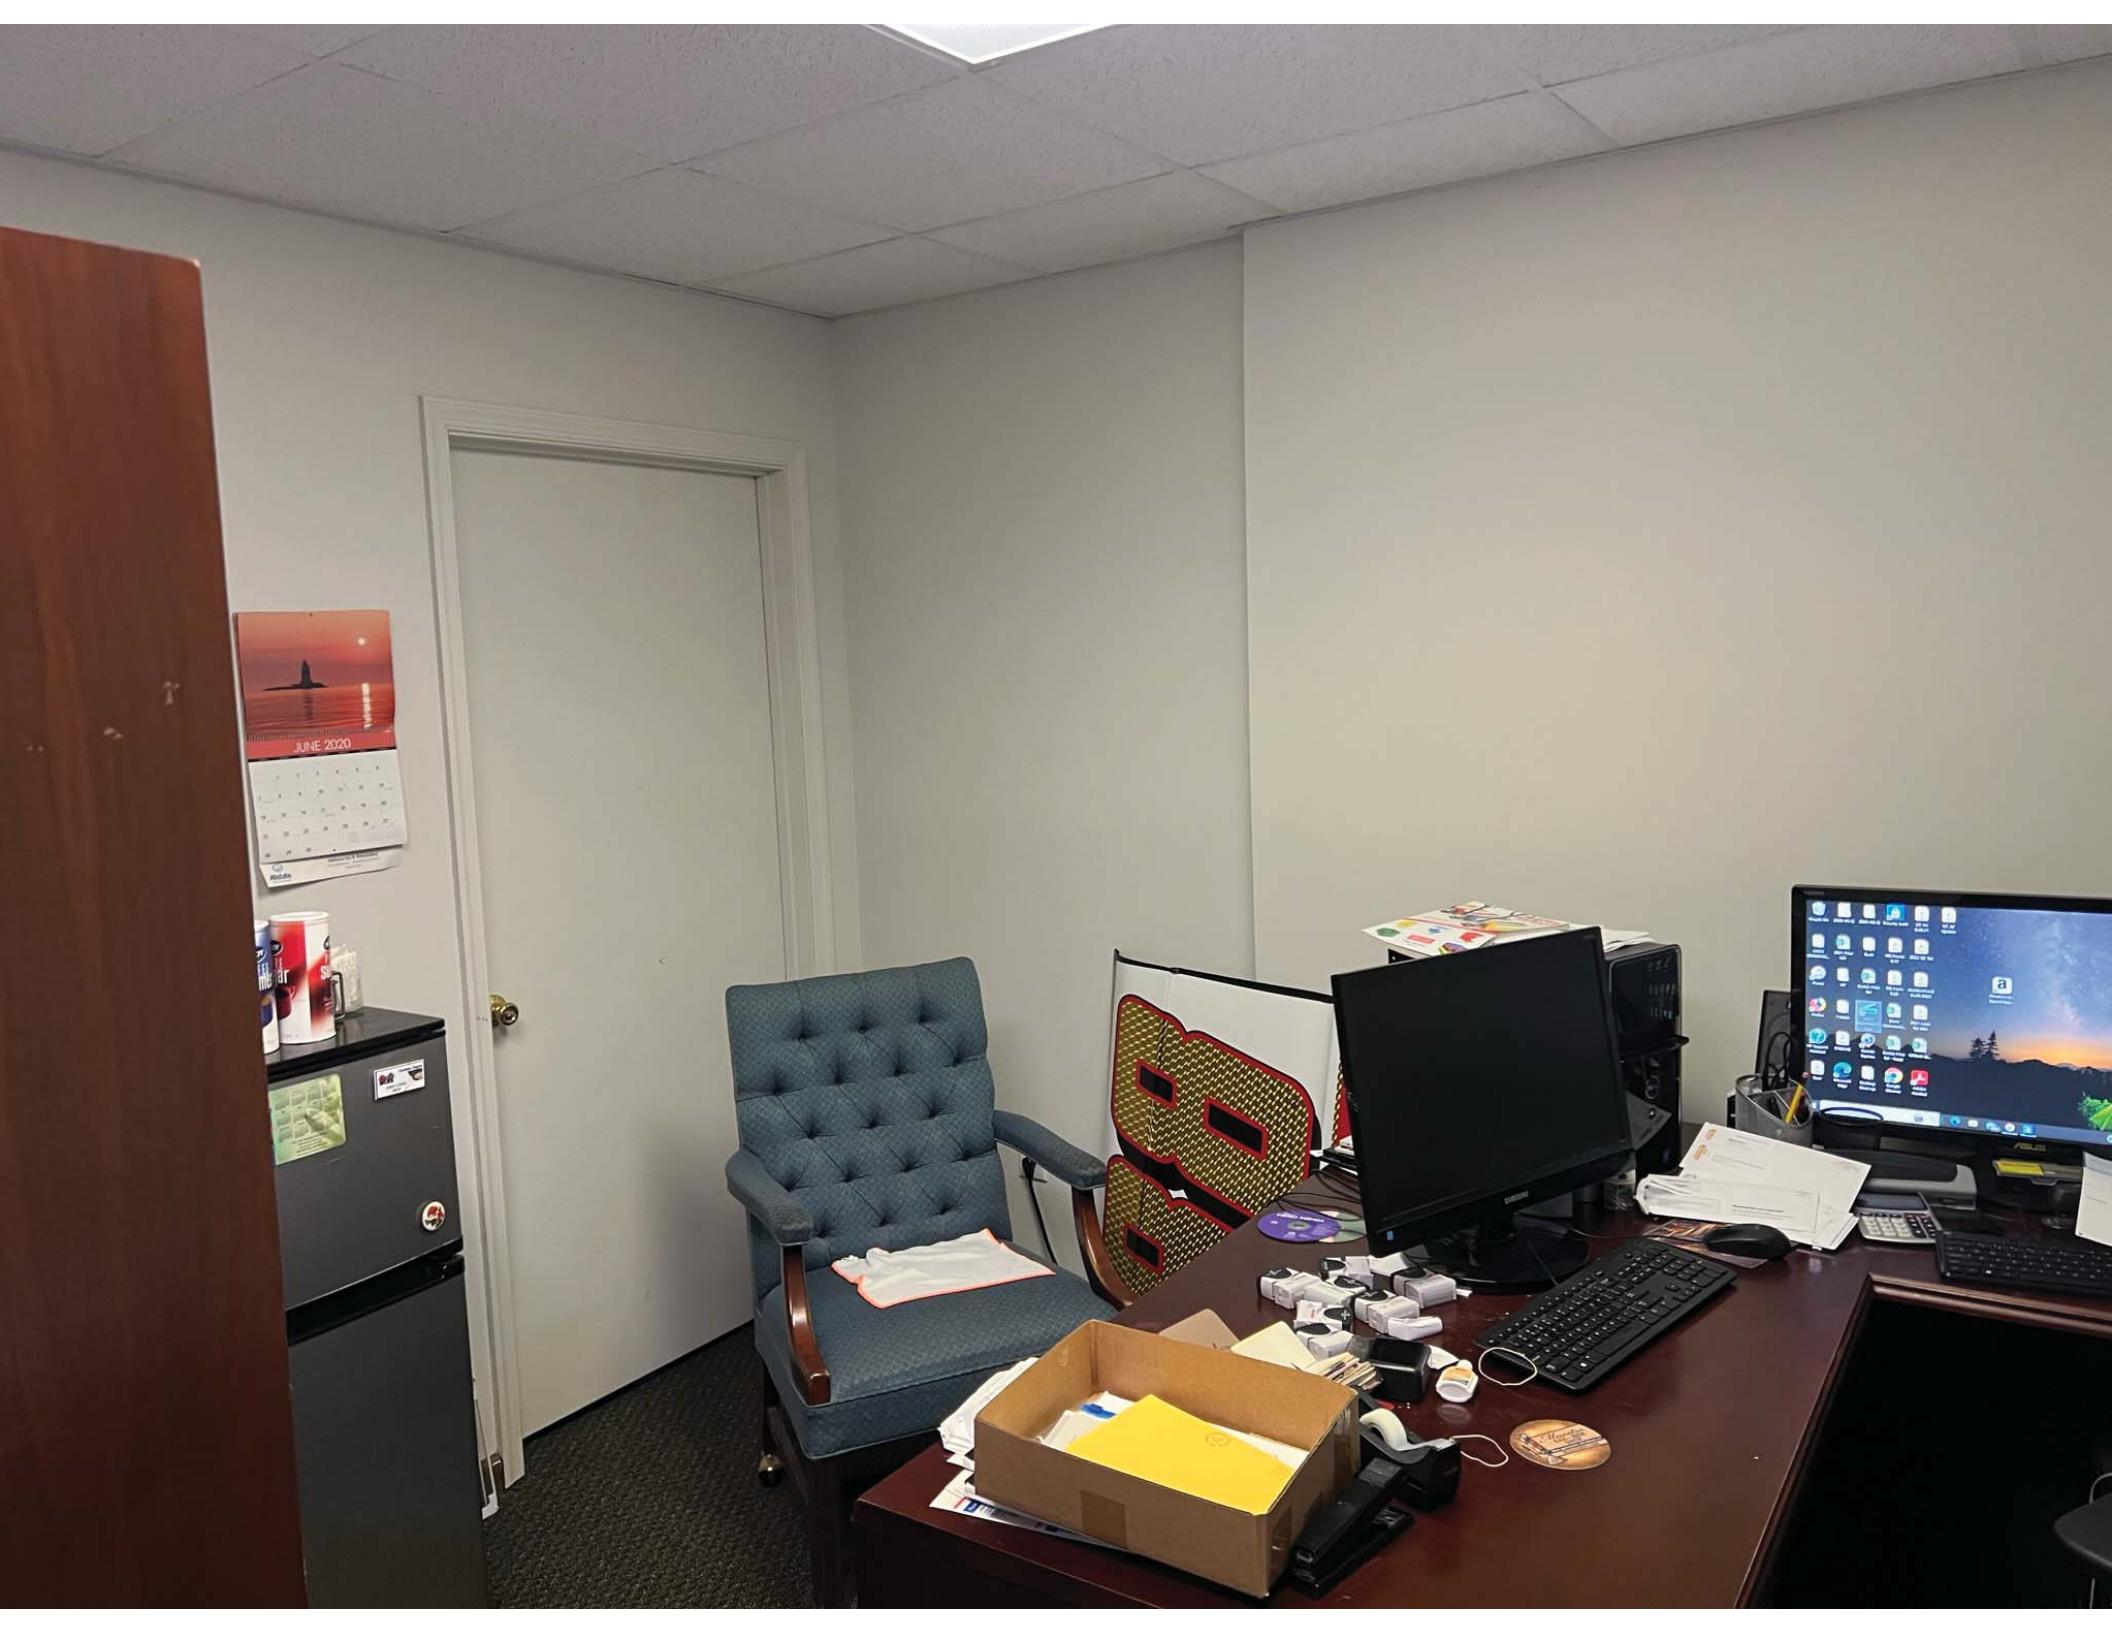









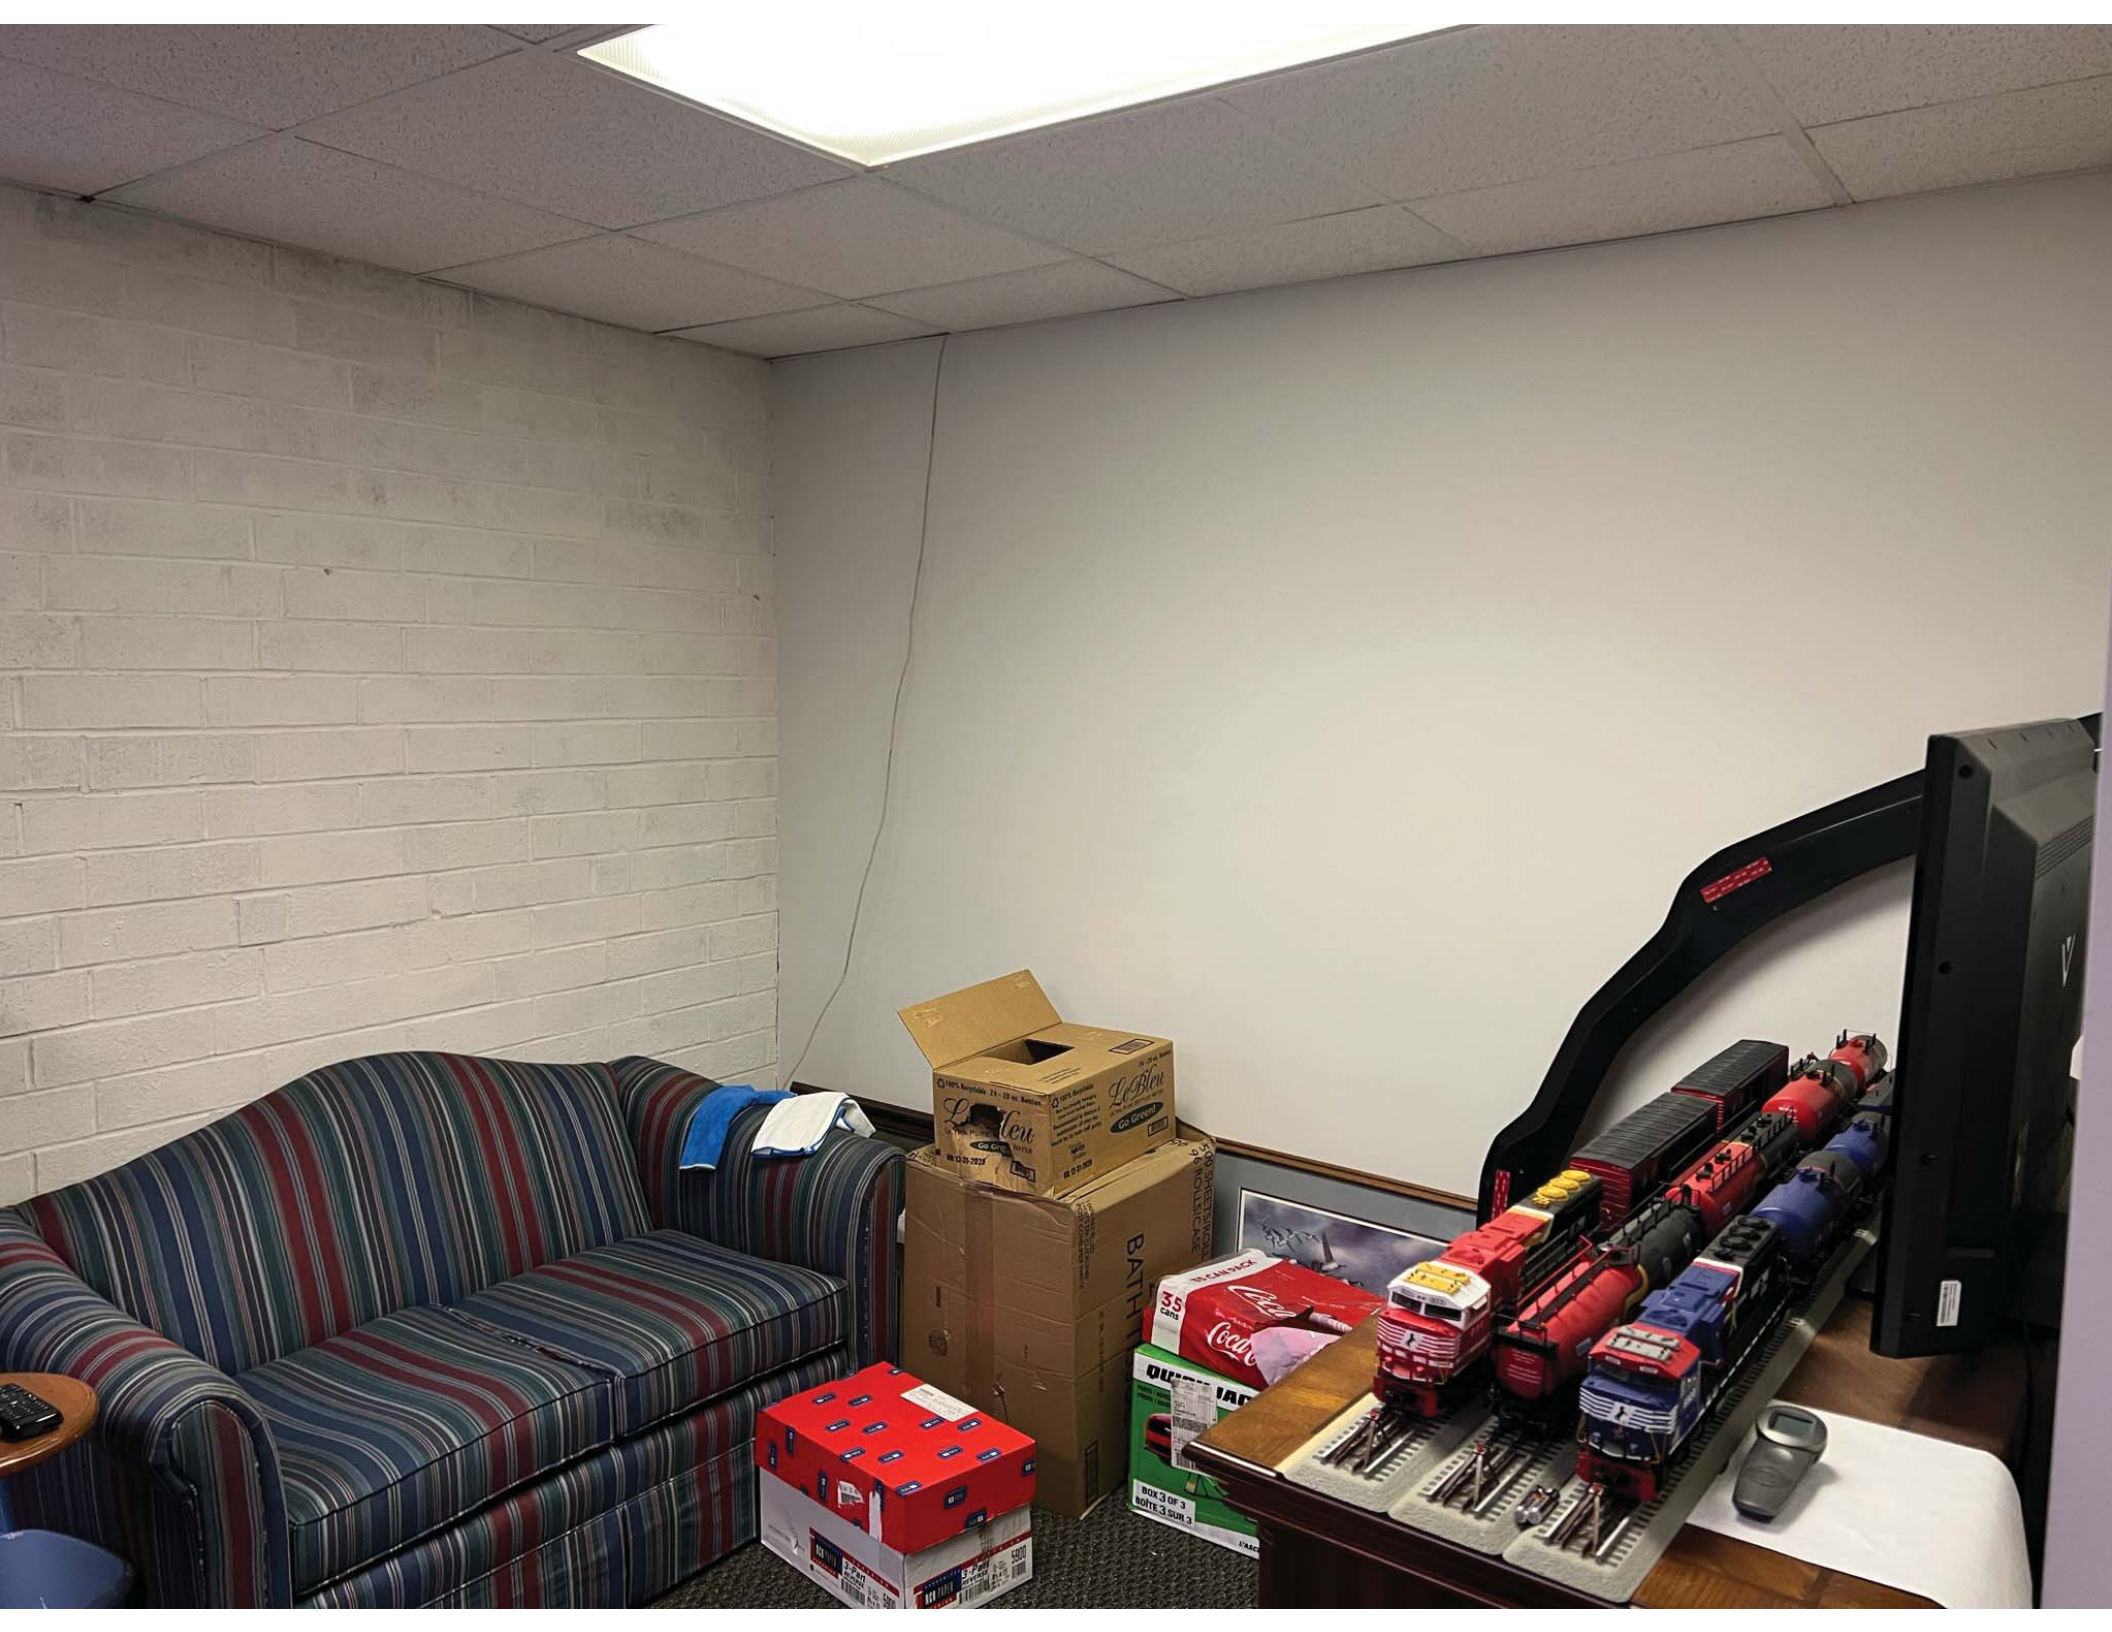



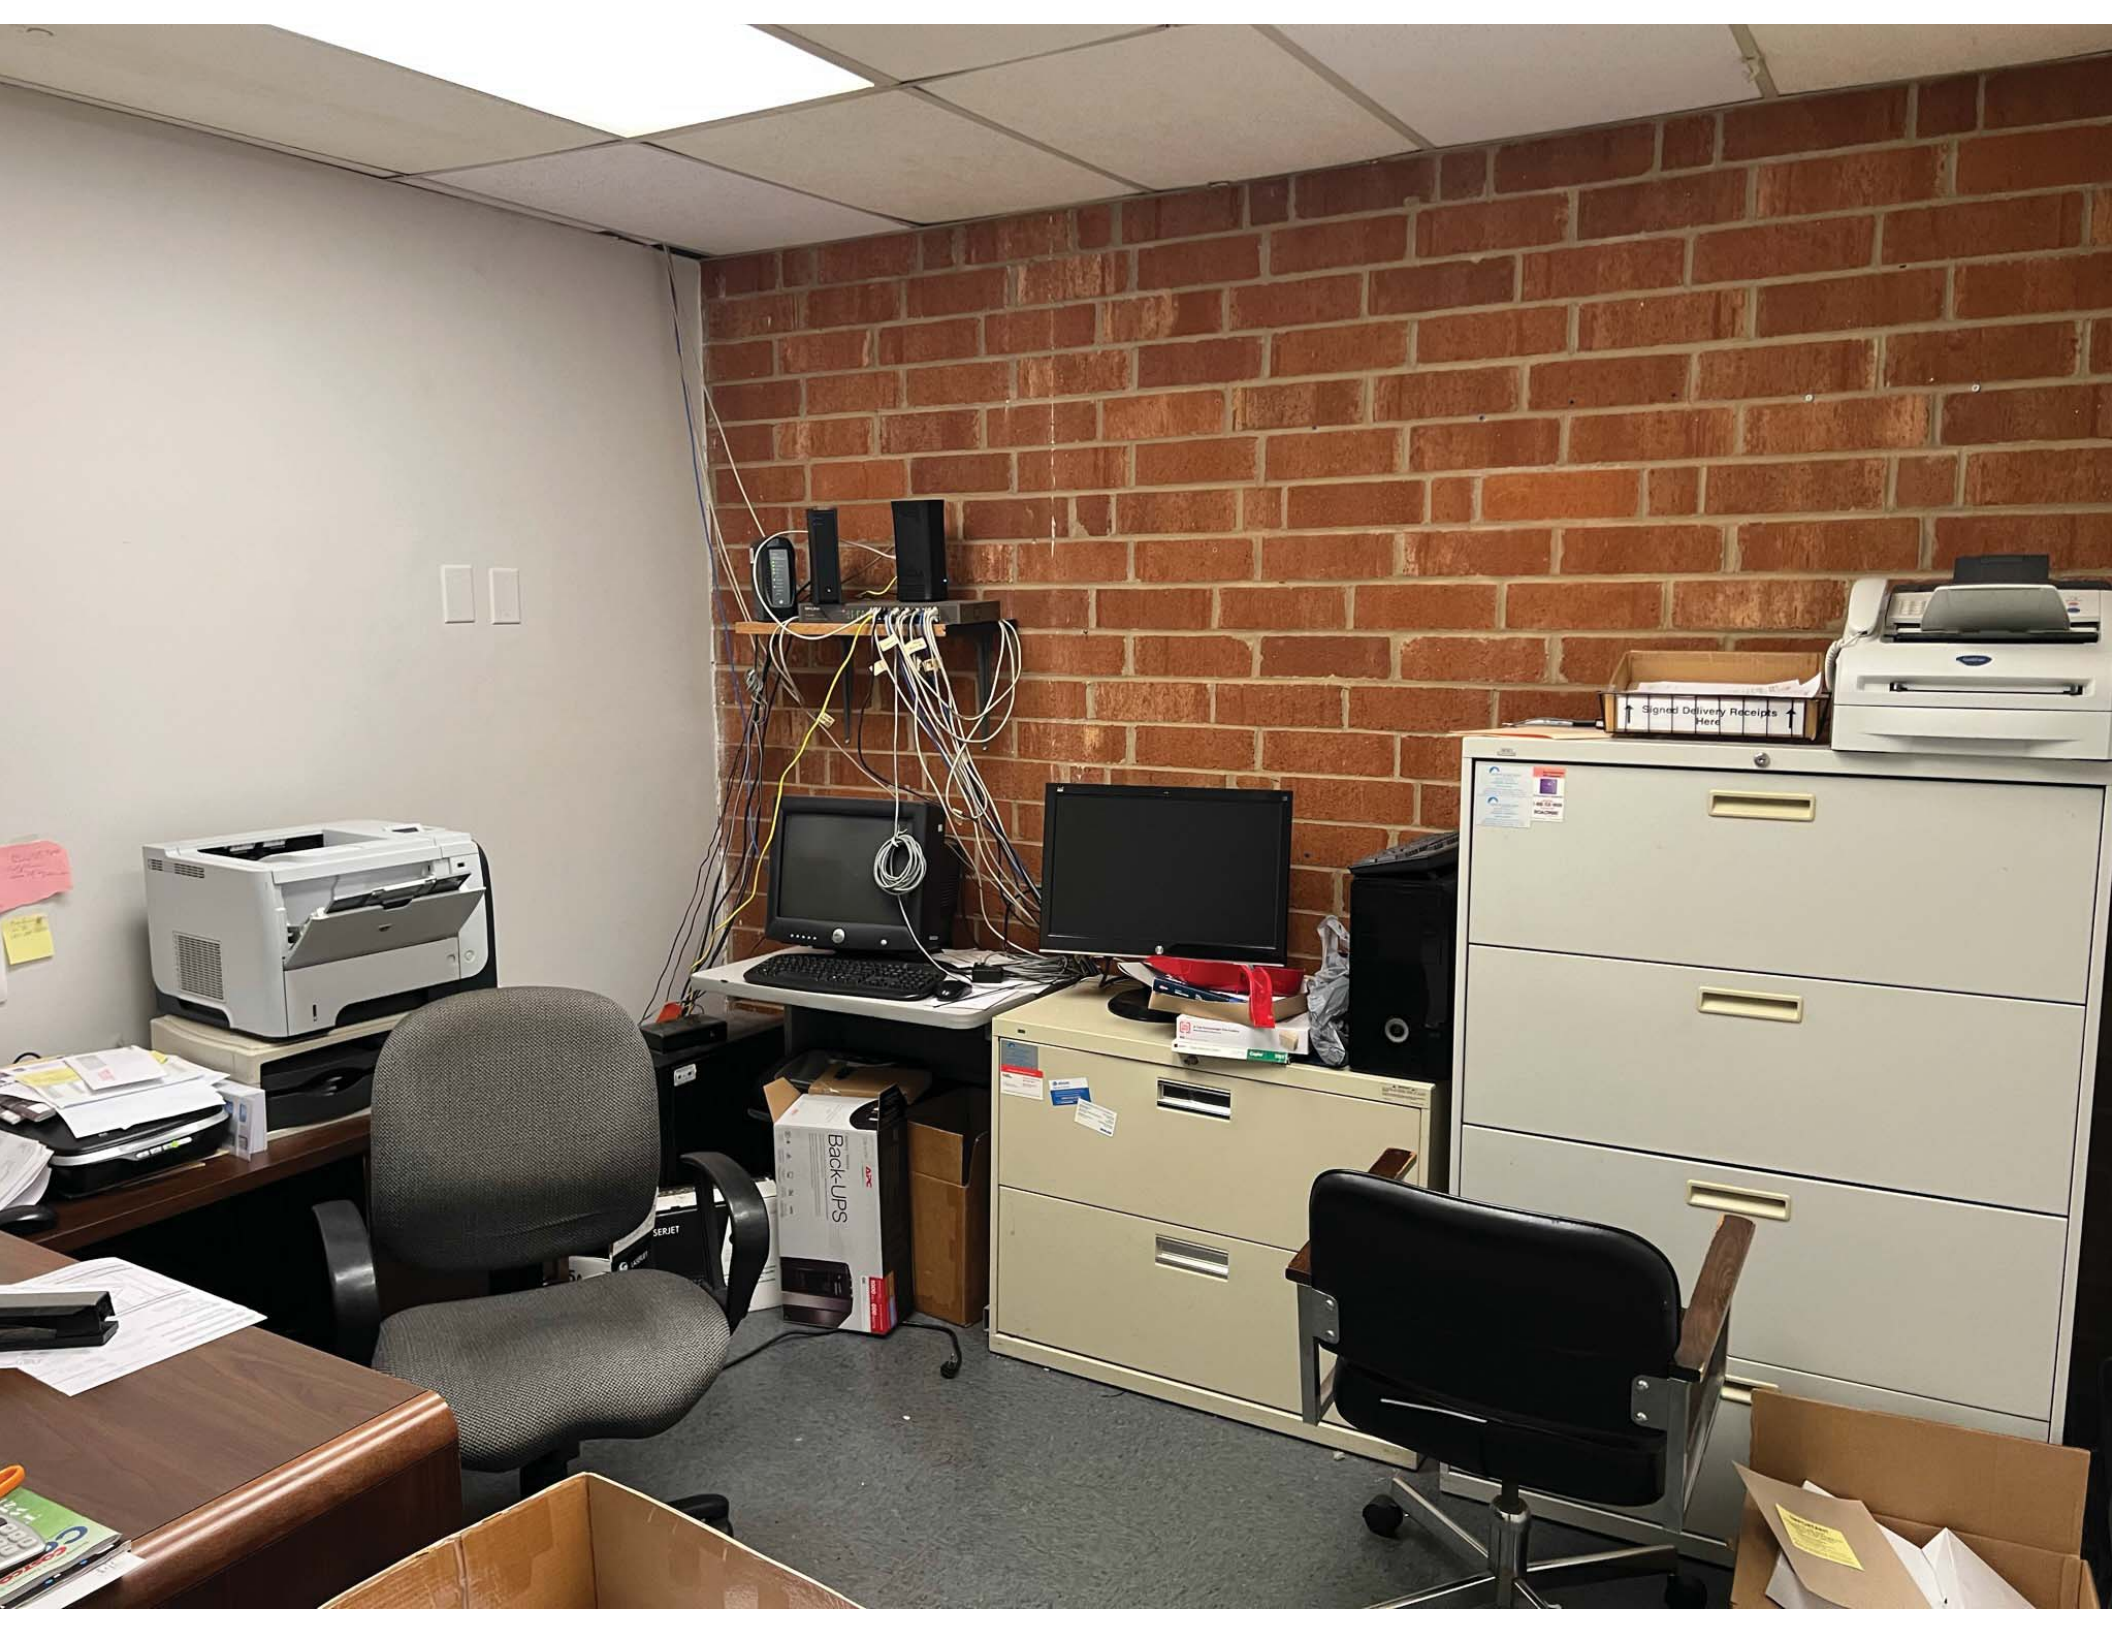




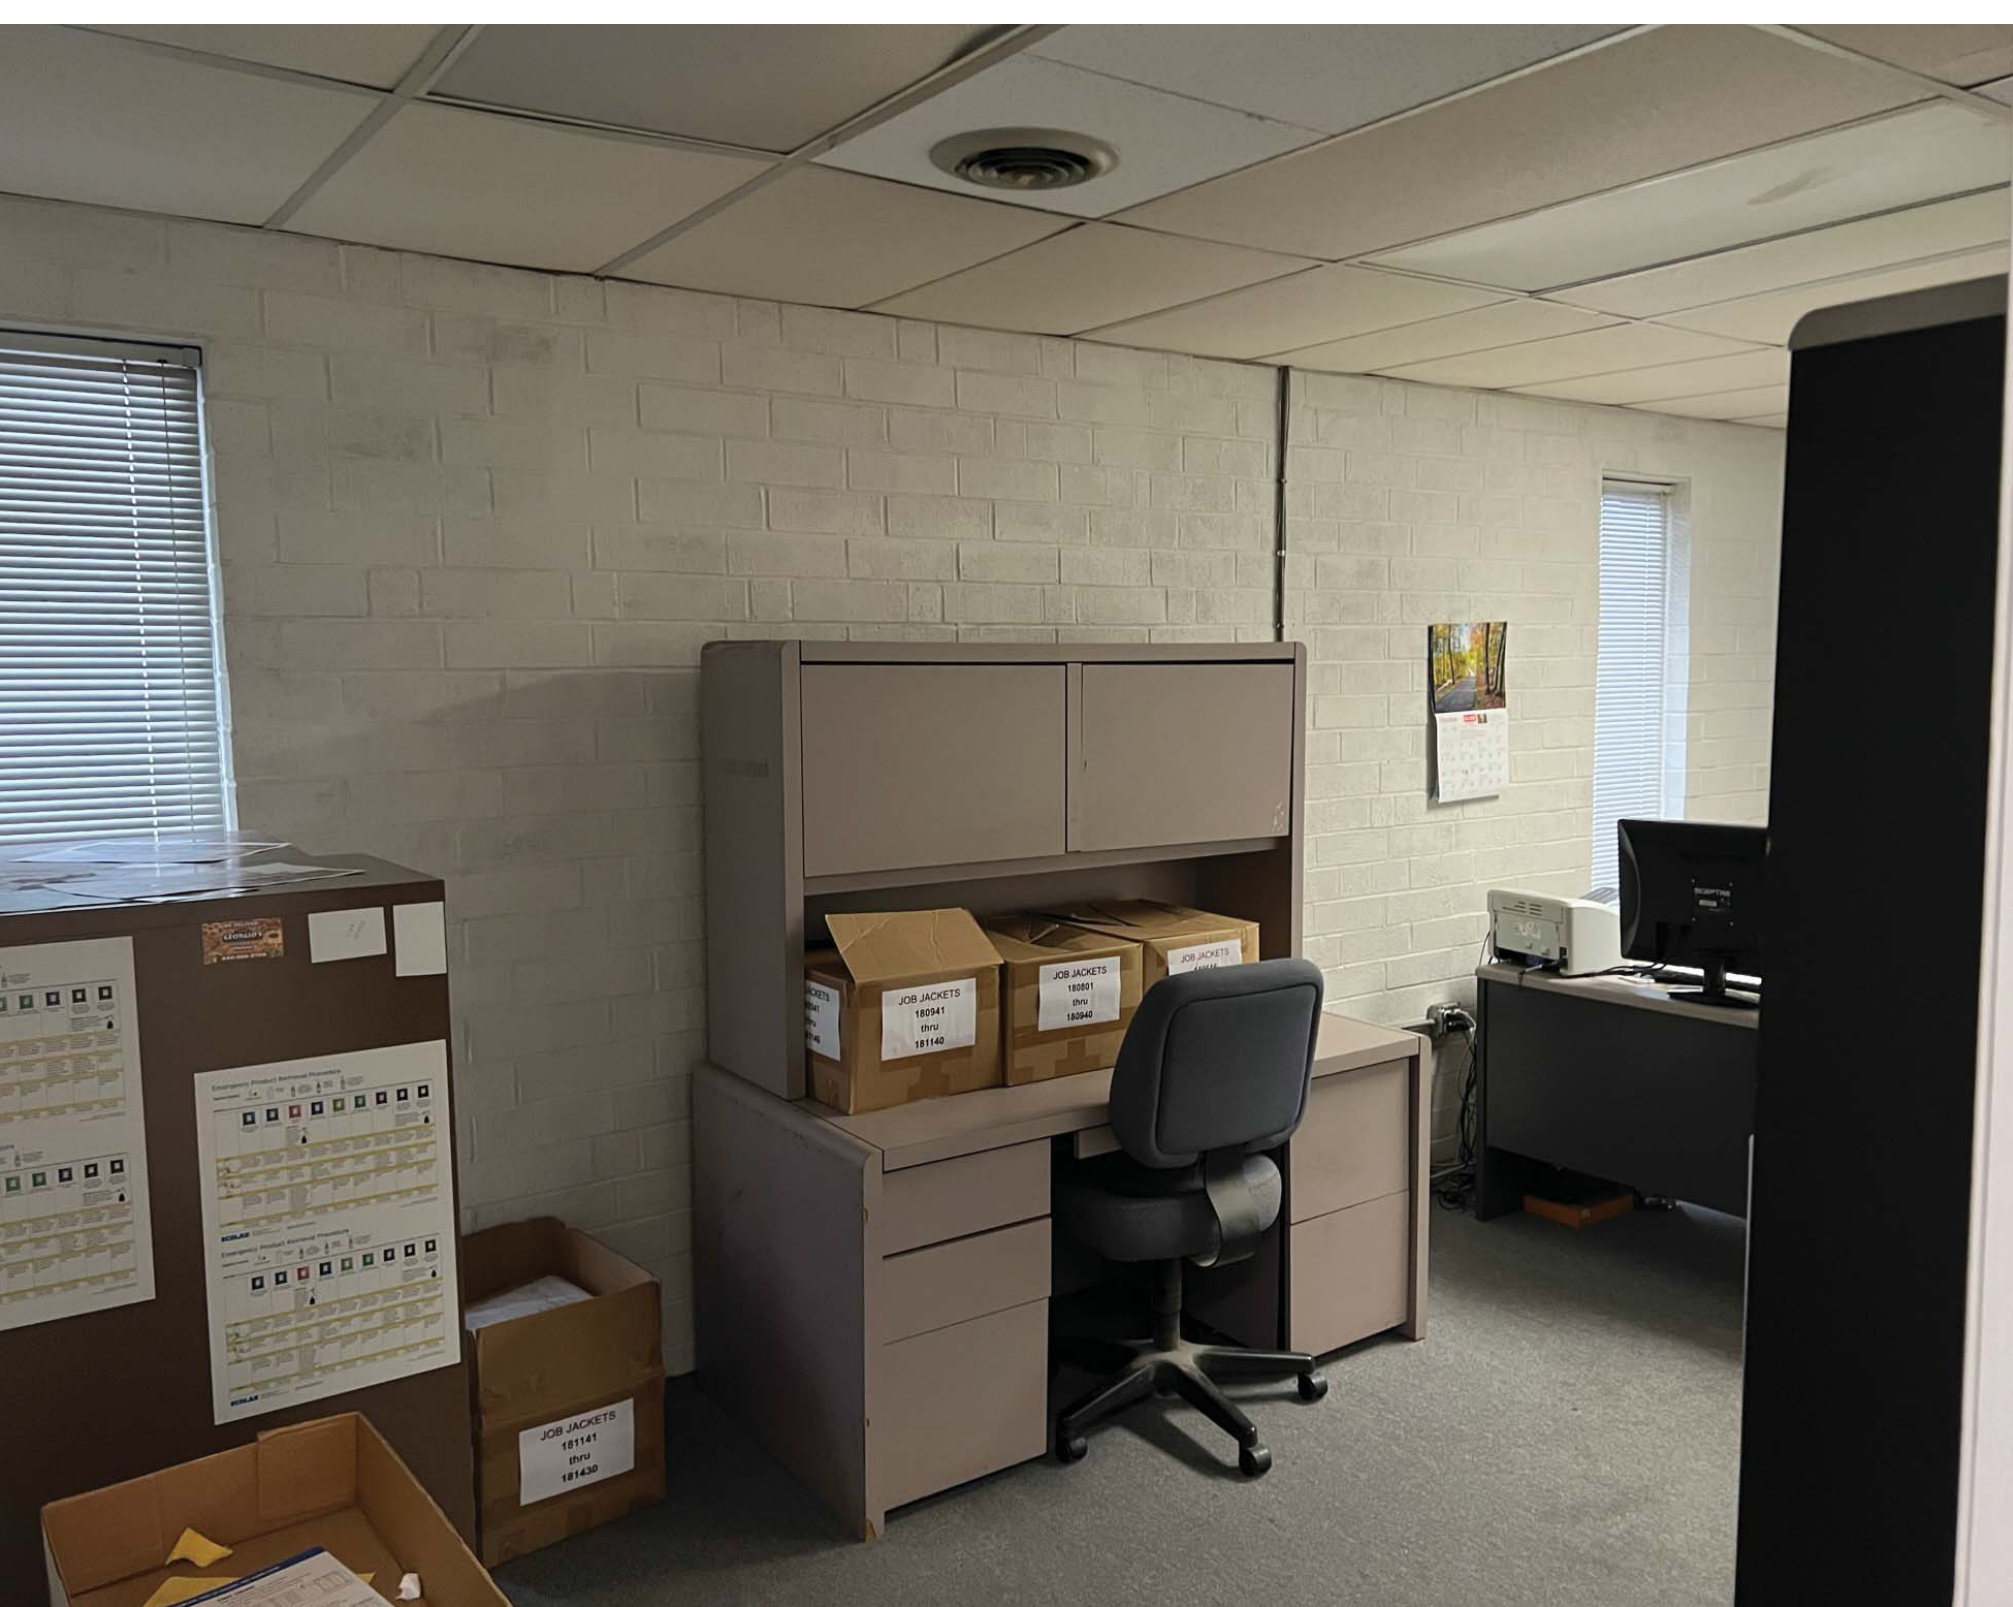







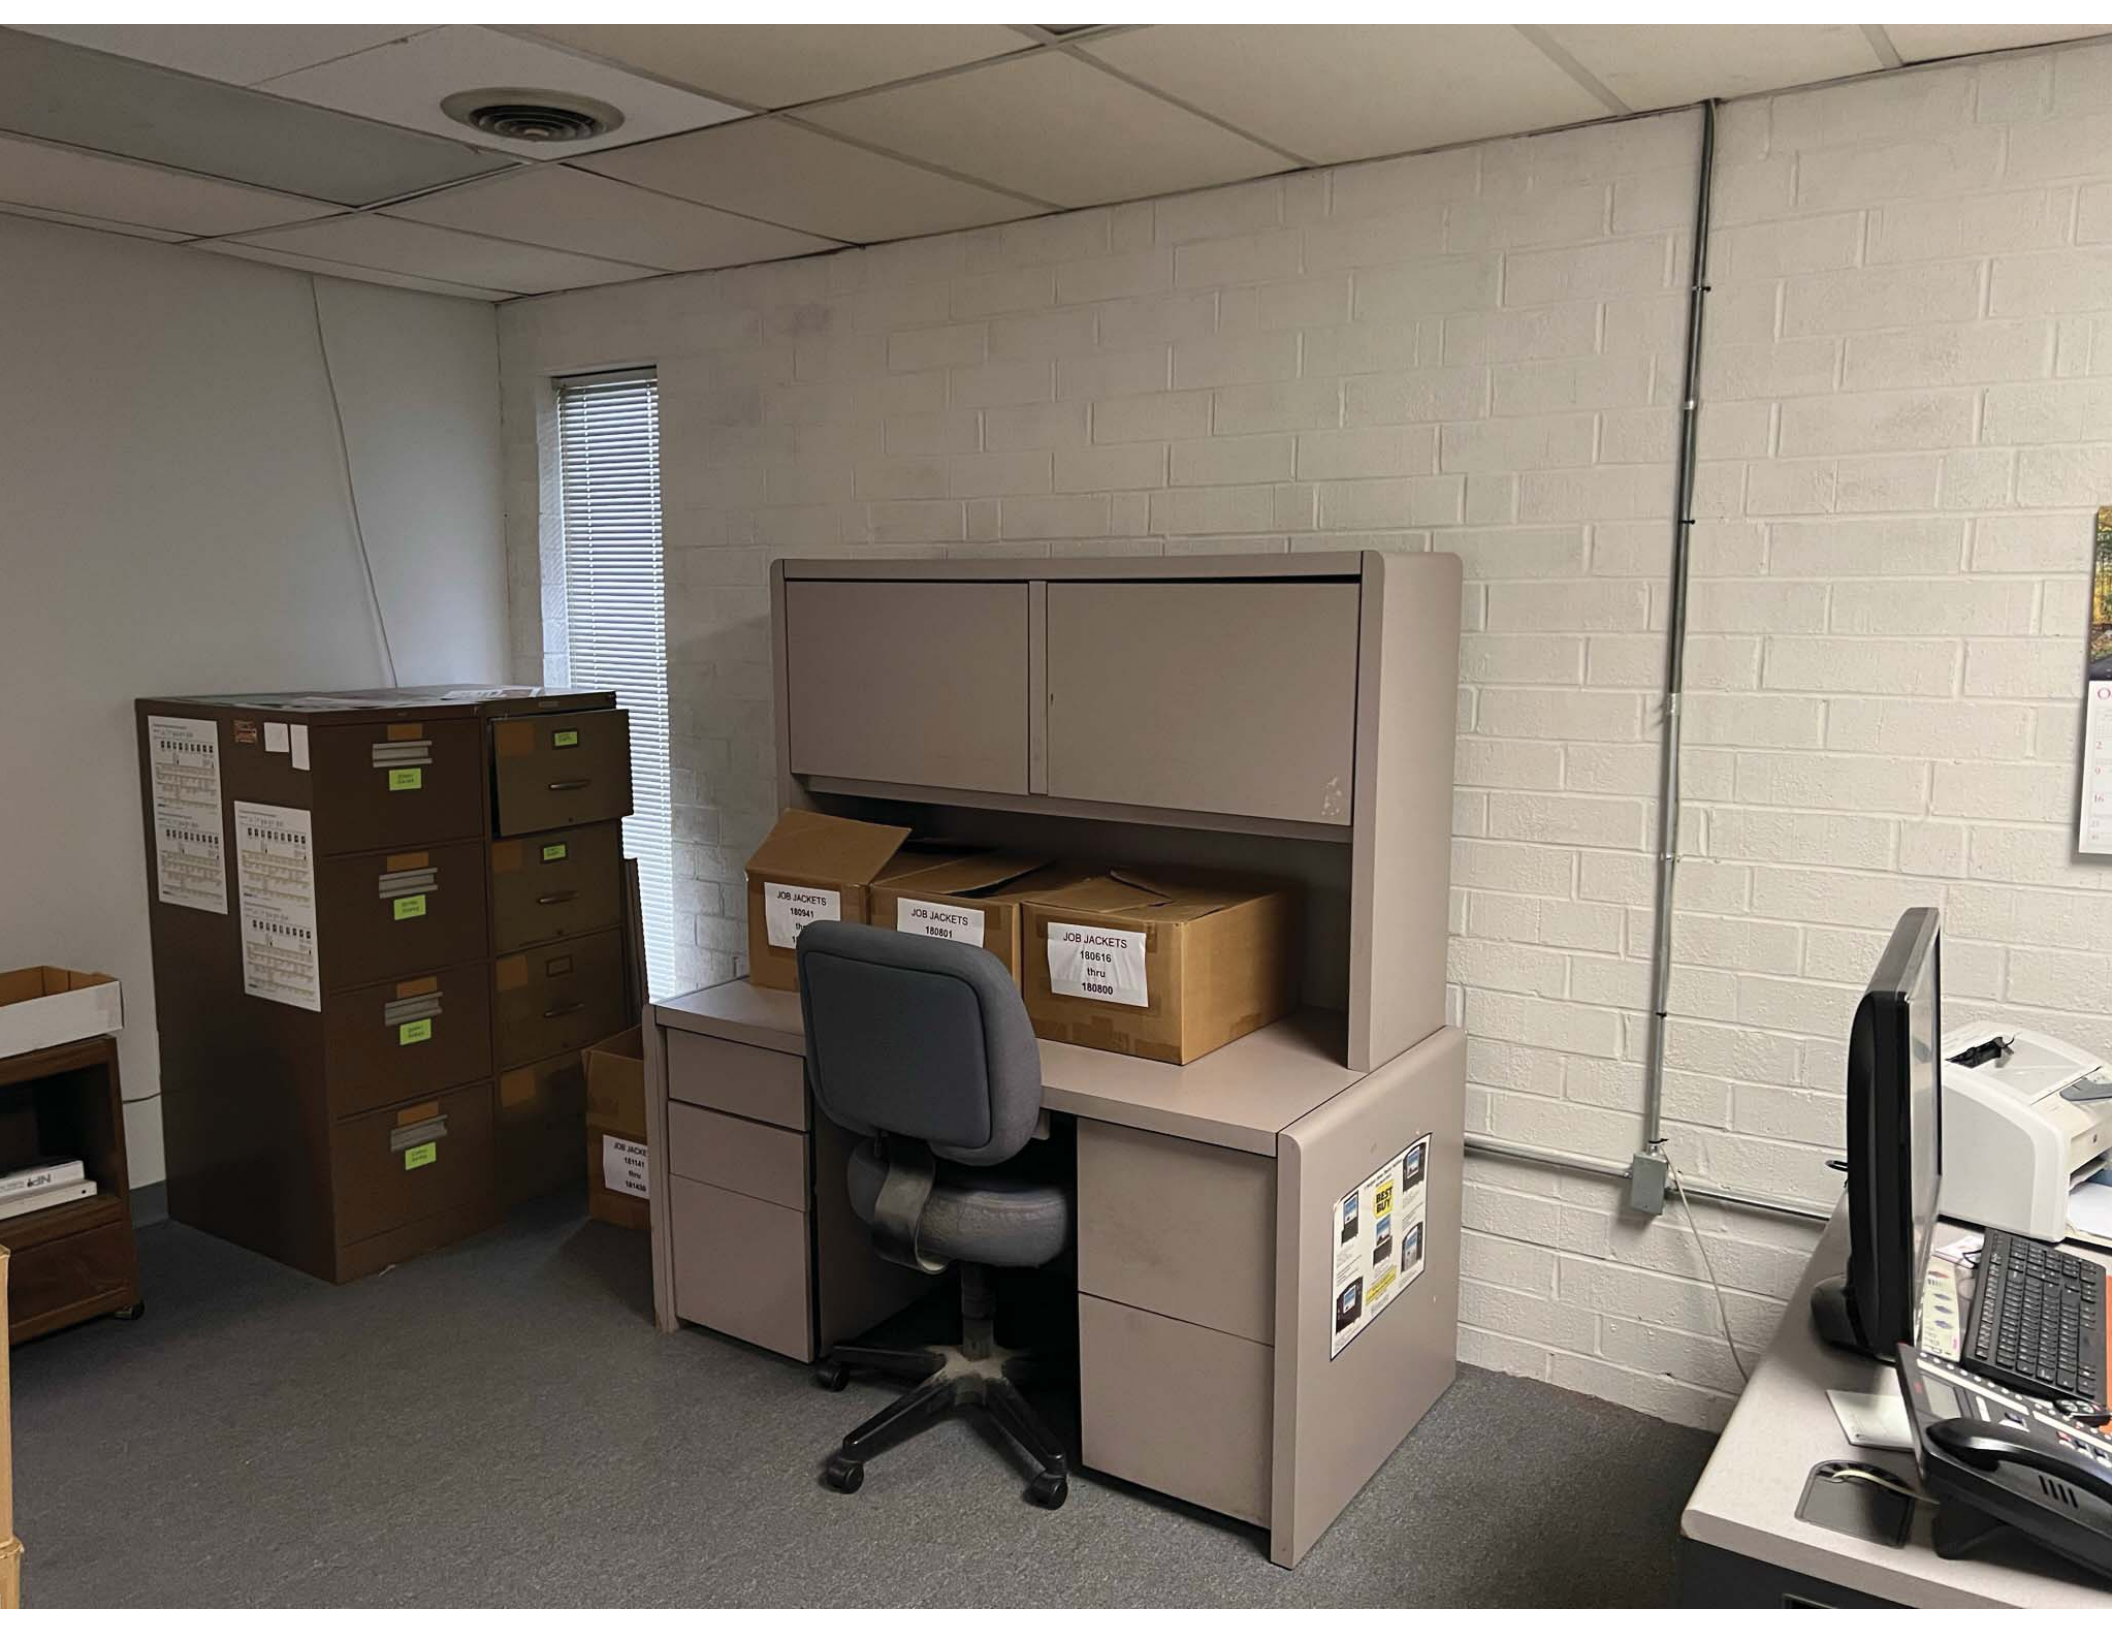











**Acme Transformer**  
LUMBERTON NC • A DIVISION OF ACME ELECTRIC CORPORATION  
**GENERAL PURPOSE TRANSFORMER**  
CATALOG NO T-1-81052 STYLE SR  
PRIMARY VOLTS 120X240  
SECONDARY VOLTS 12X24 WT 19 LBS  
.75 kVA 50/60 HZ 1 PHASE WINDING RISE 100 °C  
% IMPEDANCE AT °C INSTRUCTIONS 1-40  
MINIMUM FIELD INSTALLED CLEARANCES: SIDE 4 INCHES, VERTICAL 4 INCHES  
UL LISTED 5088 SF  
ENCLOSURE TYPE 3R OUTDOOR  
INSULATION SYSTEM X-3221-L CLASS 155  
WIRING INFORMATION ON INSIDE COVER  
A-6-701167

EIA-413-9529

**Acme Transformer**  
LUMBERTON NC • A DIVISION OF ACME ELECTRIC CORPORATION  
**GENERAL PURPOSE TRANSFORMER**  
CATALOG NO T-1-81052 STYLE SR  
PRIMARY VOLTS 120X240  
SECONDARY VOLTS 12X24 WT 19 LBS  
.75 kVA 50/60 HZ 1 PHASE WINDING RISE 100 °C  
% IMPEDANCE AT °C INSTRUCTIONS 1-40  
MINIMUM FIELD INSTALLED CLEARANCES: SIDE 4 INCHES, VERTICAL 4 INCHES  
UL LISTED 5088 SF  
ENCLOSURE TYPE 3R OUTDOOR  
INSULATION SYSTEM X-3221-L CLASS 155  
WIRING INFORMATION ON INSIDE COVER  
A-6-701167

EIA-413-9529















ROLAND 200

Accent® Opag  
INTERNATIONAL PAPER




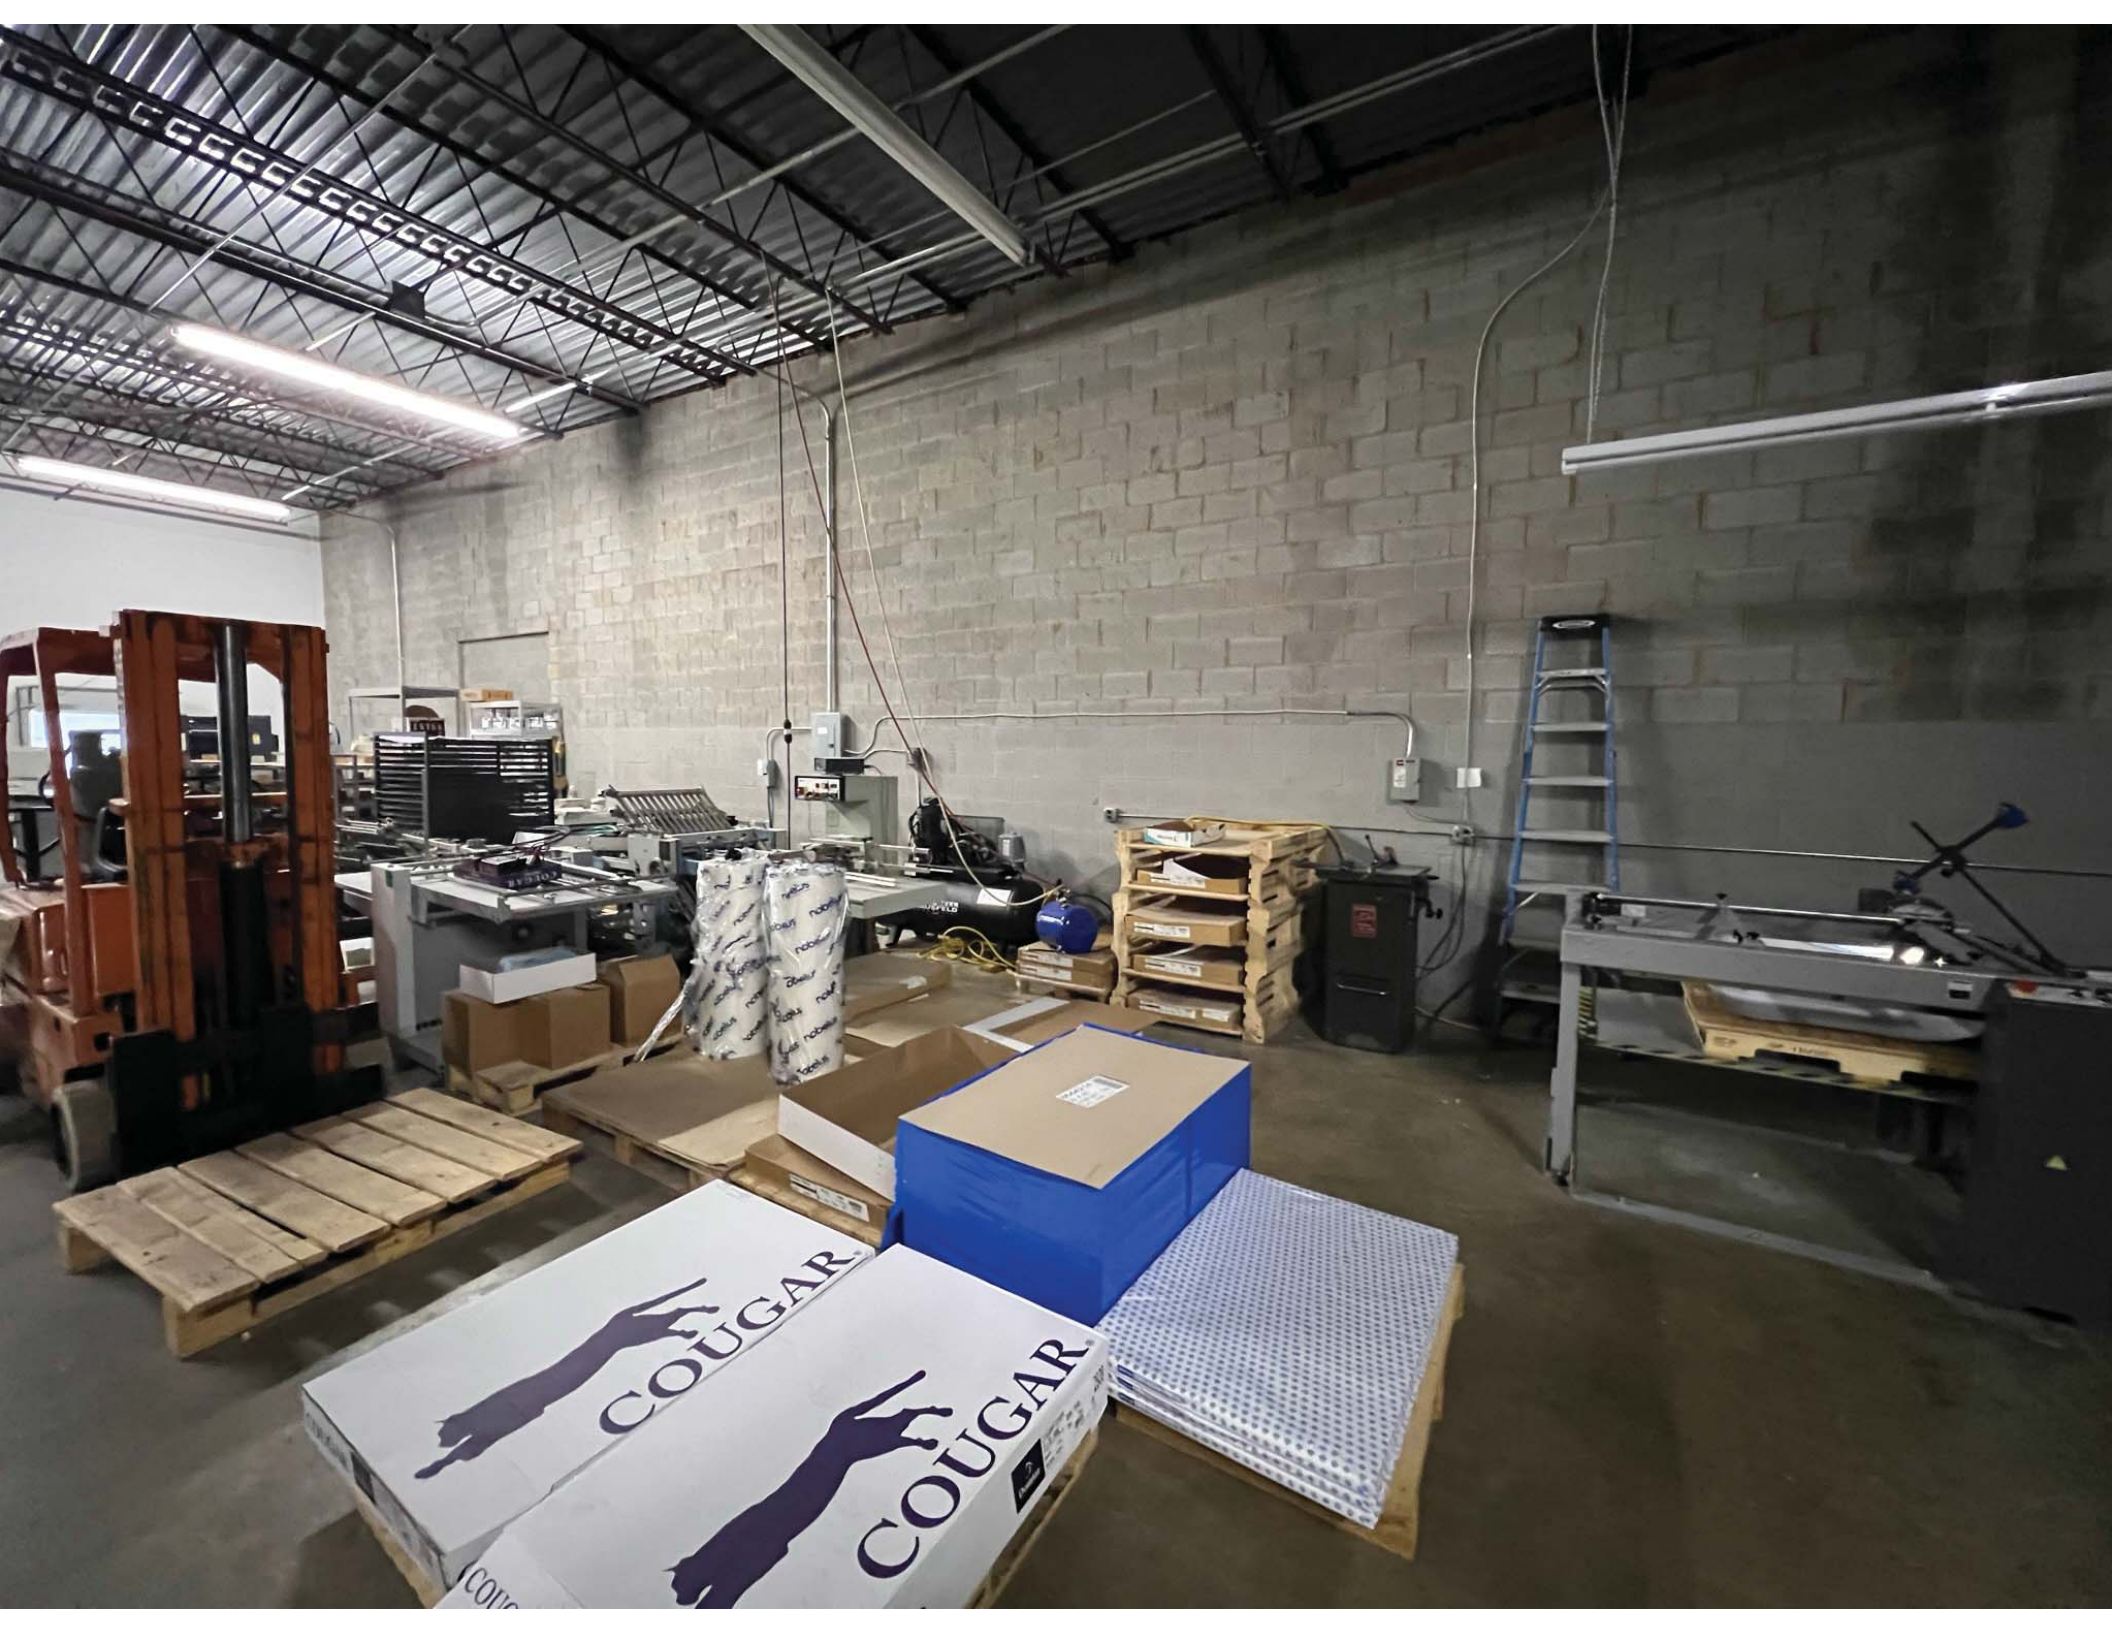




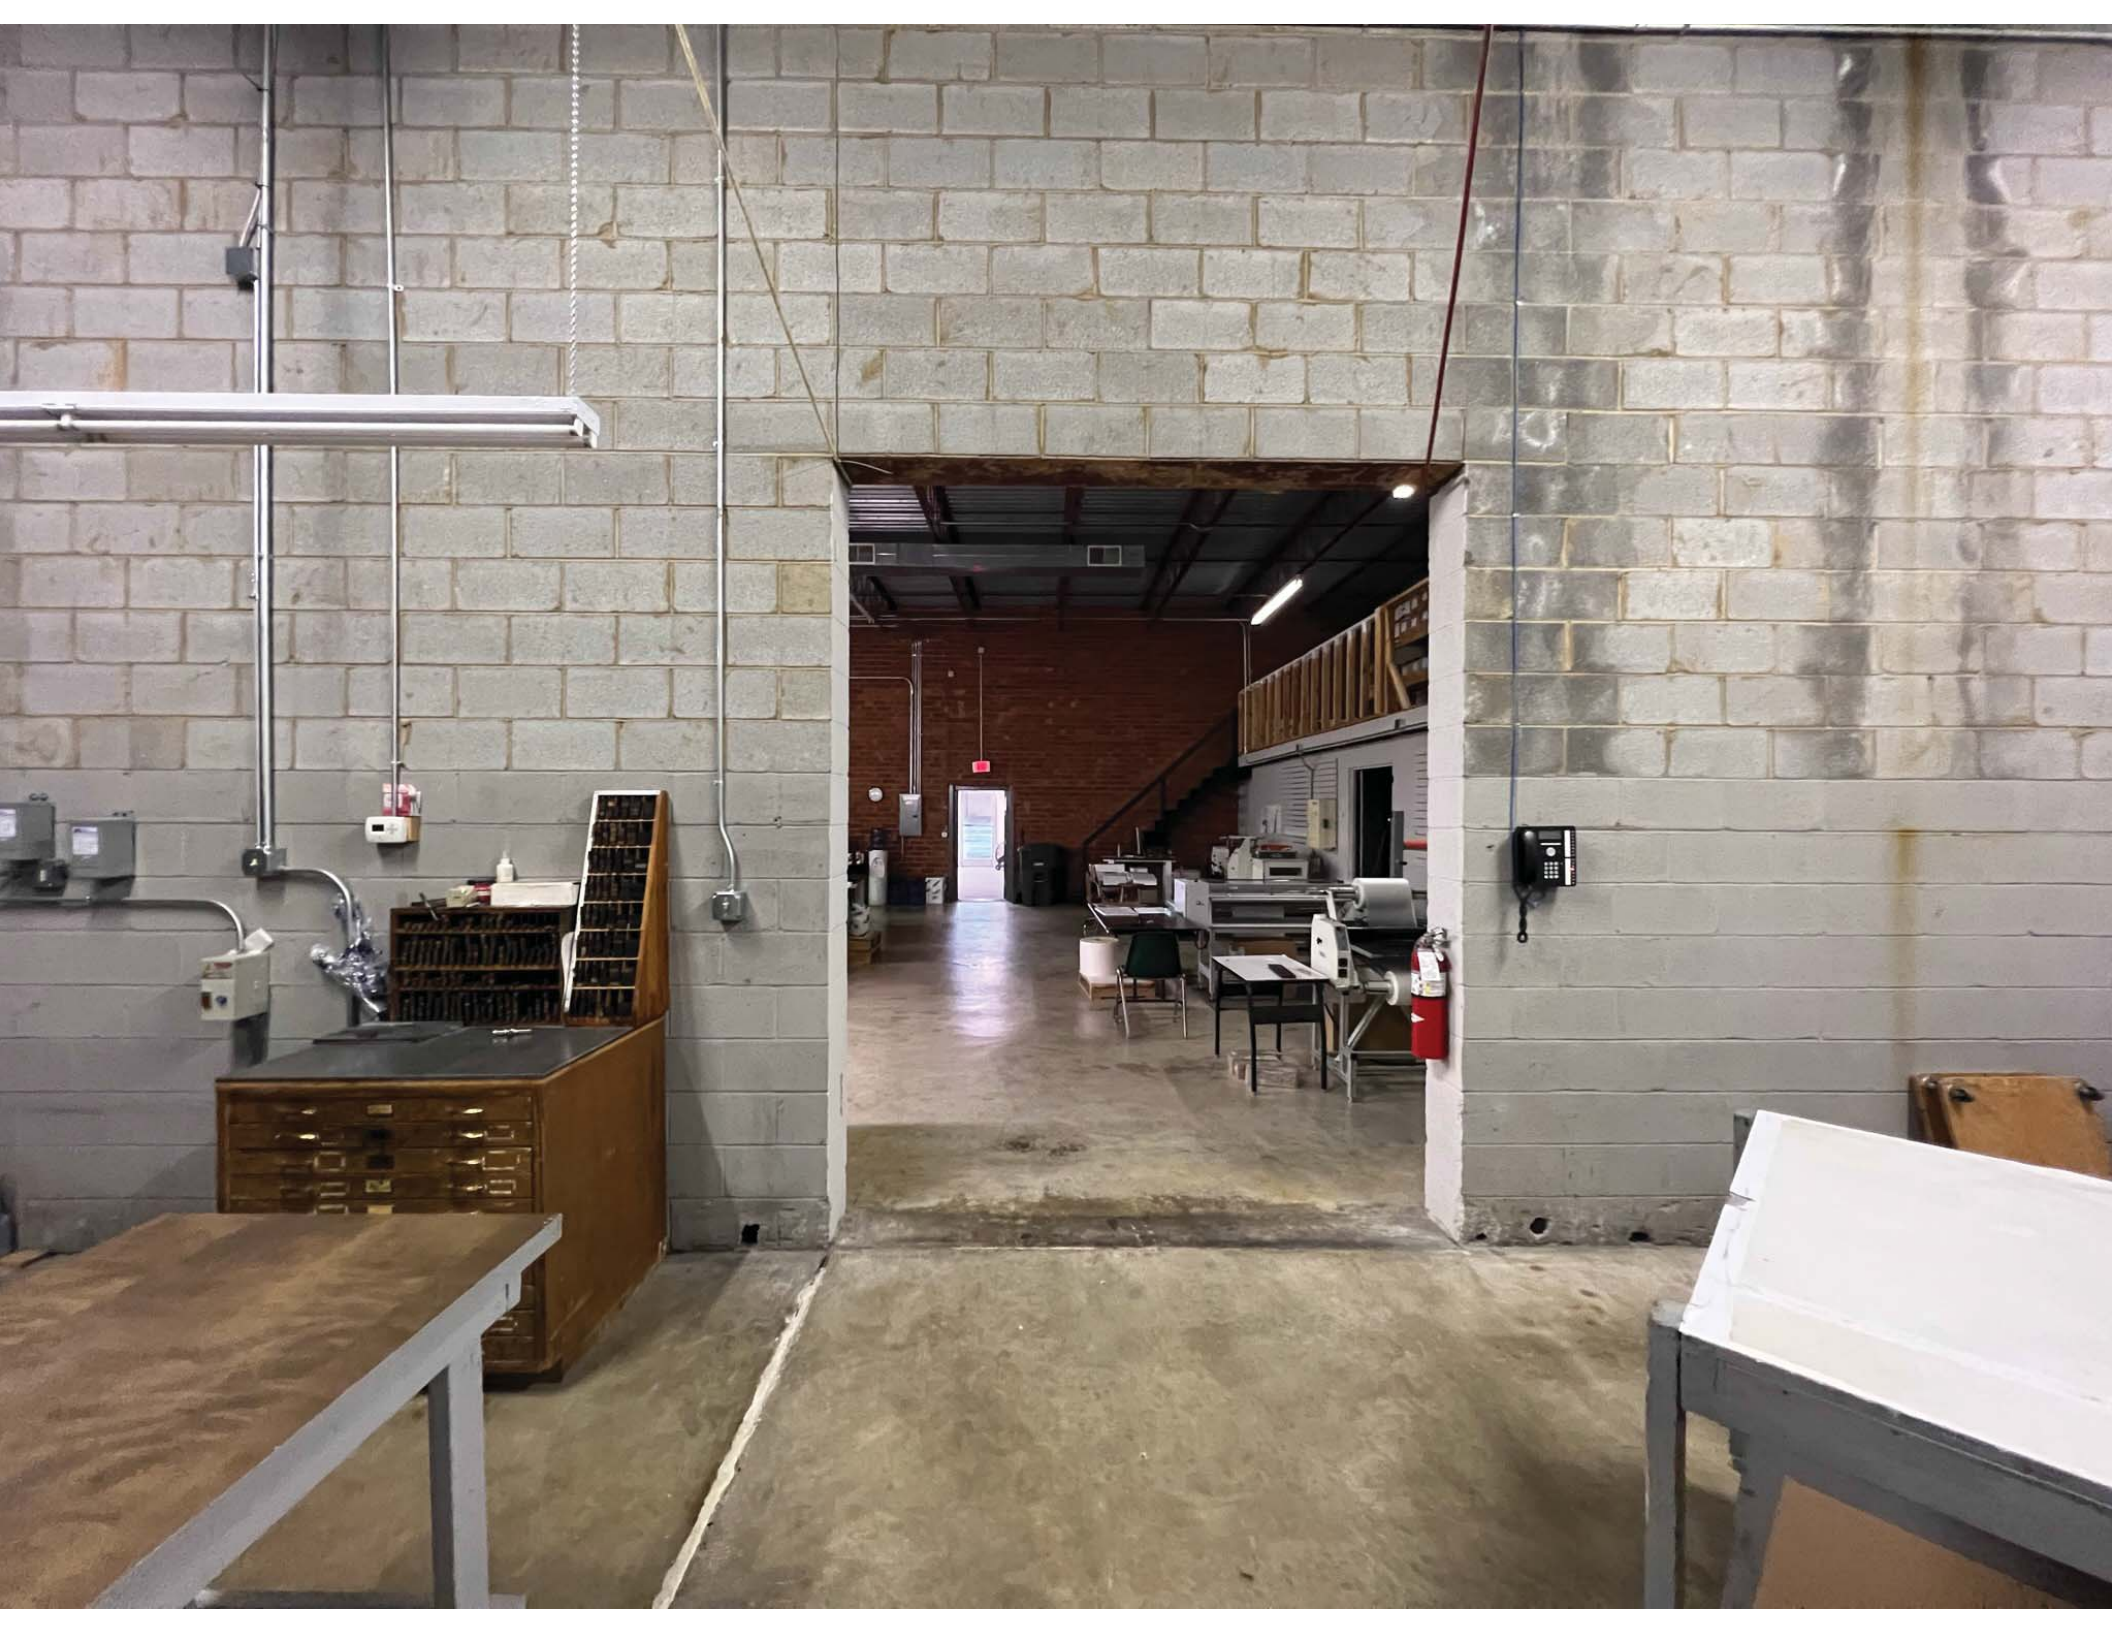



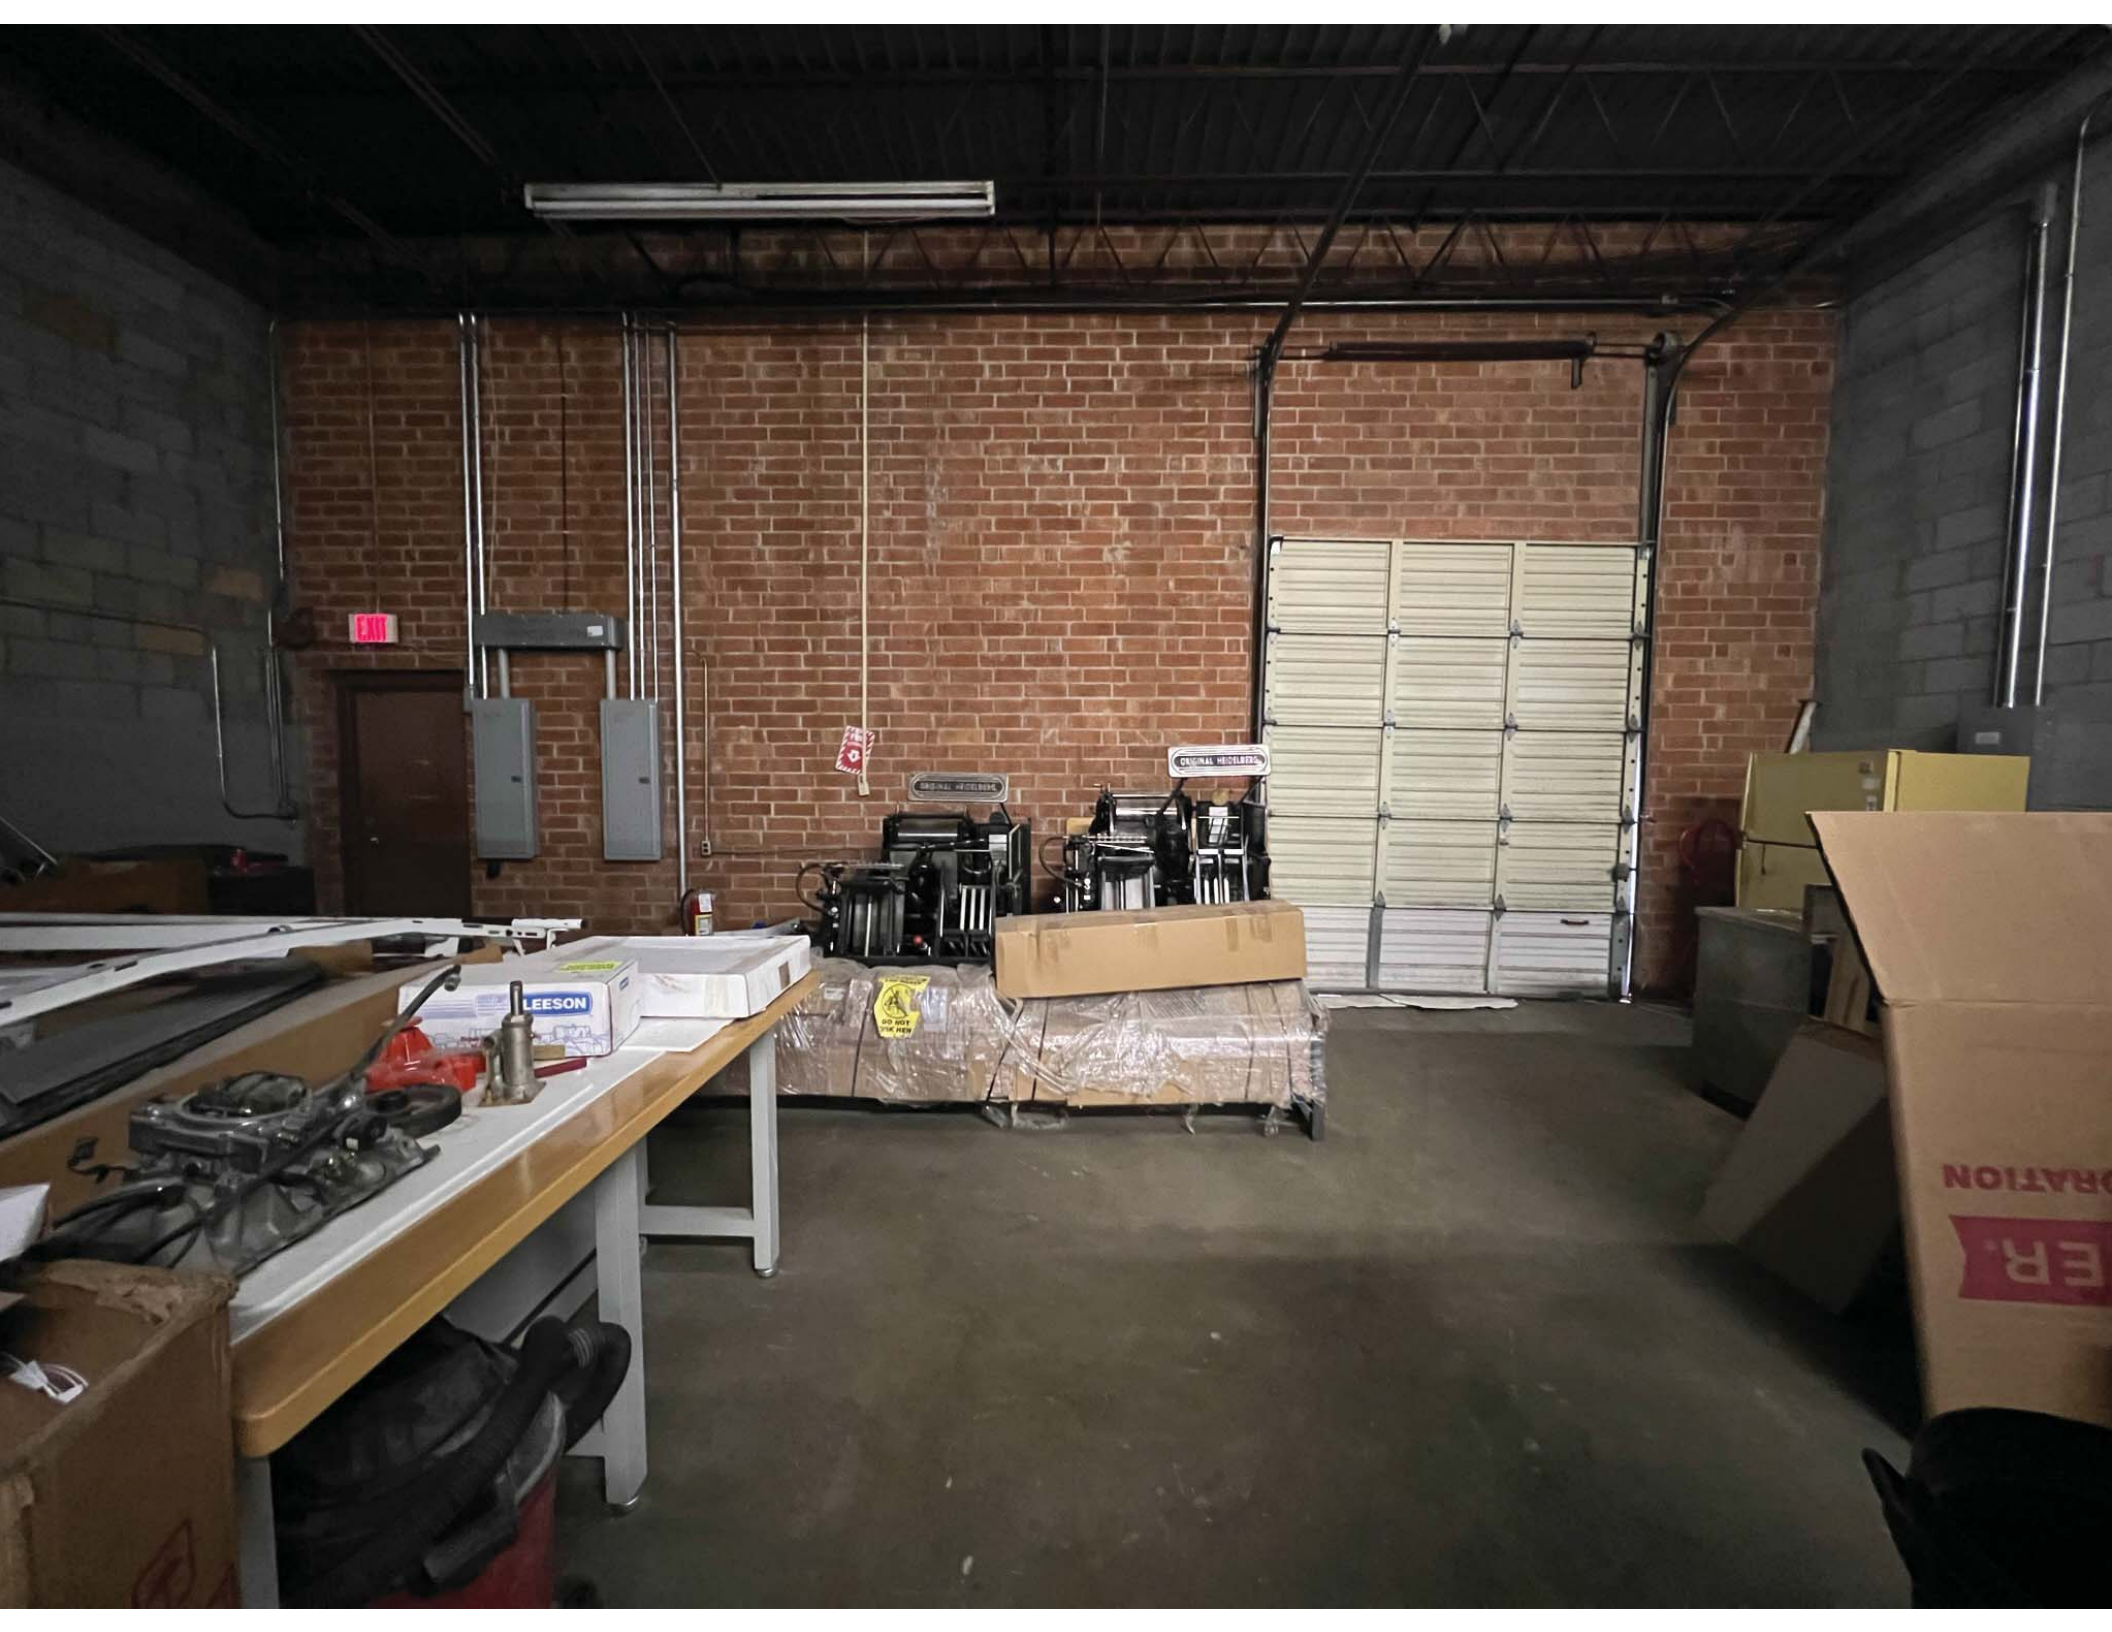



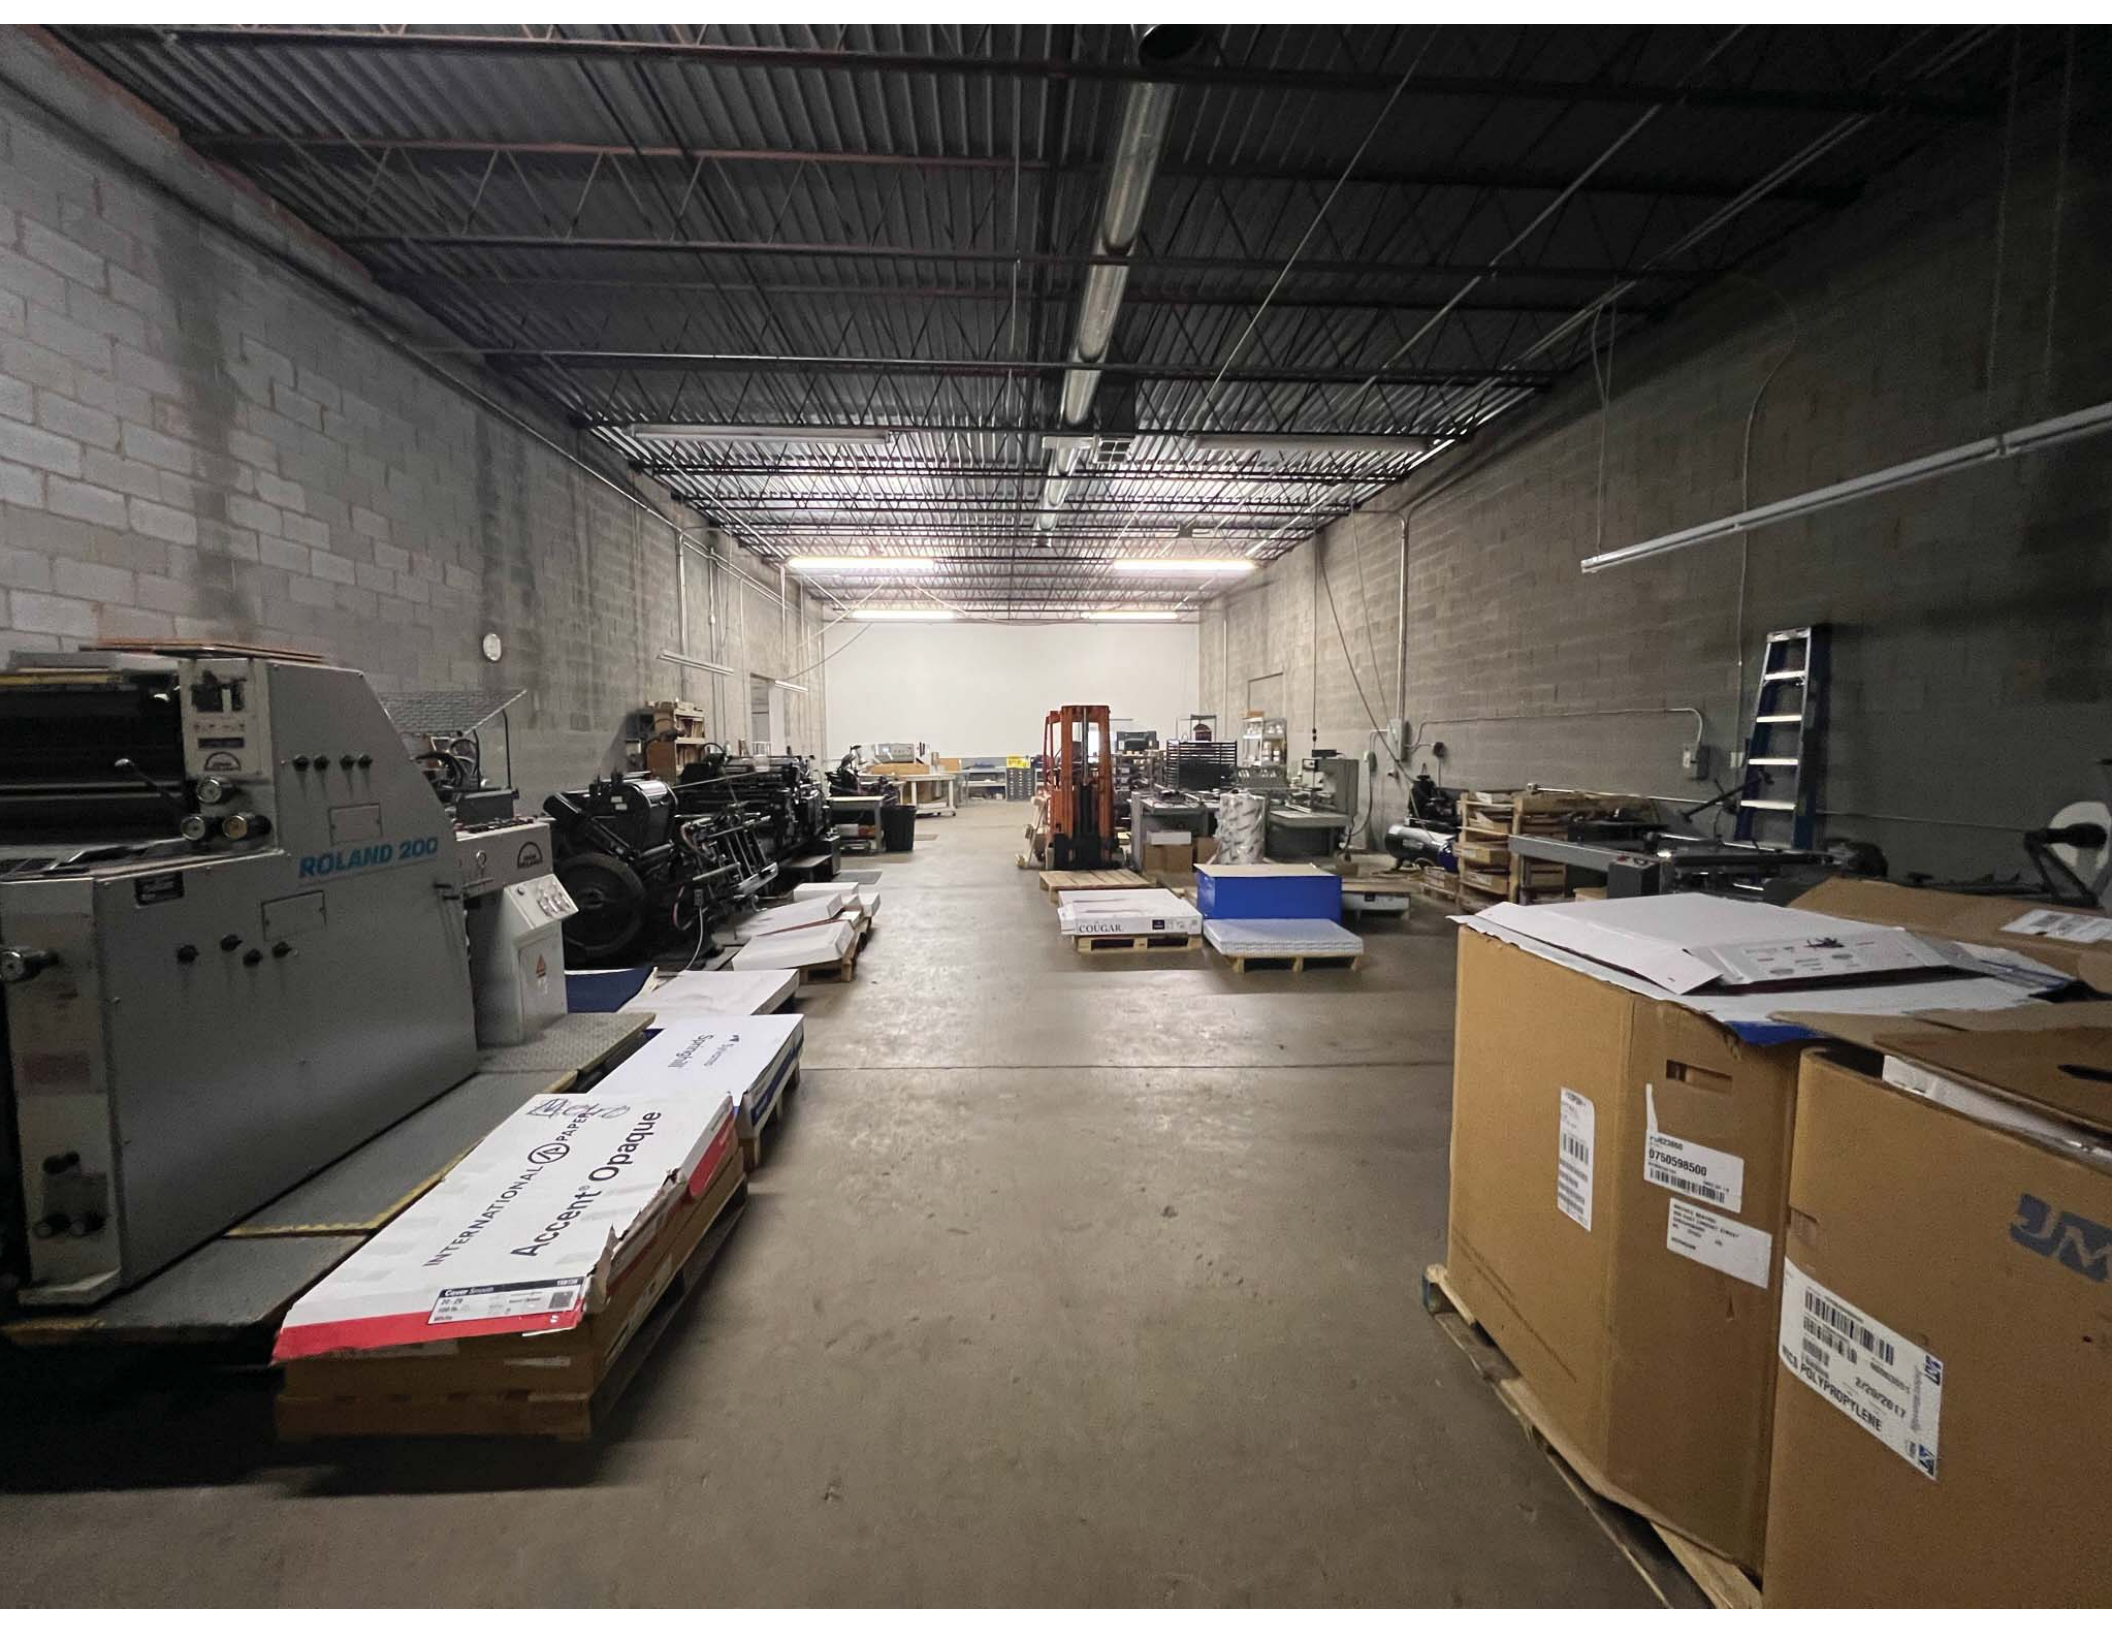


ROLAND 200

INTERNATIONAL  
Accent® Opague


9750598500

POLYPROPYLENE



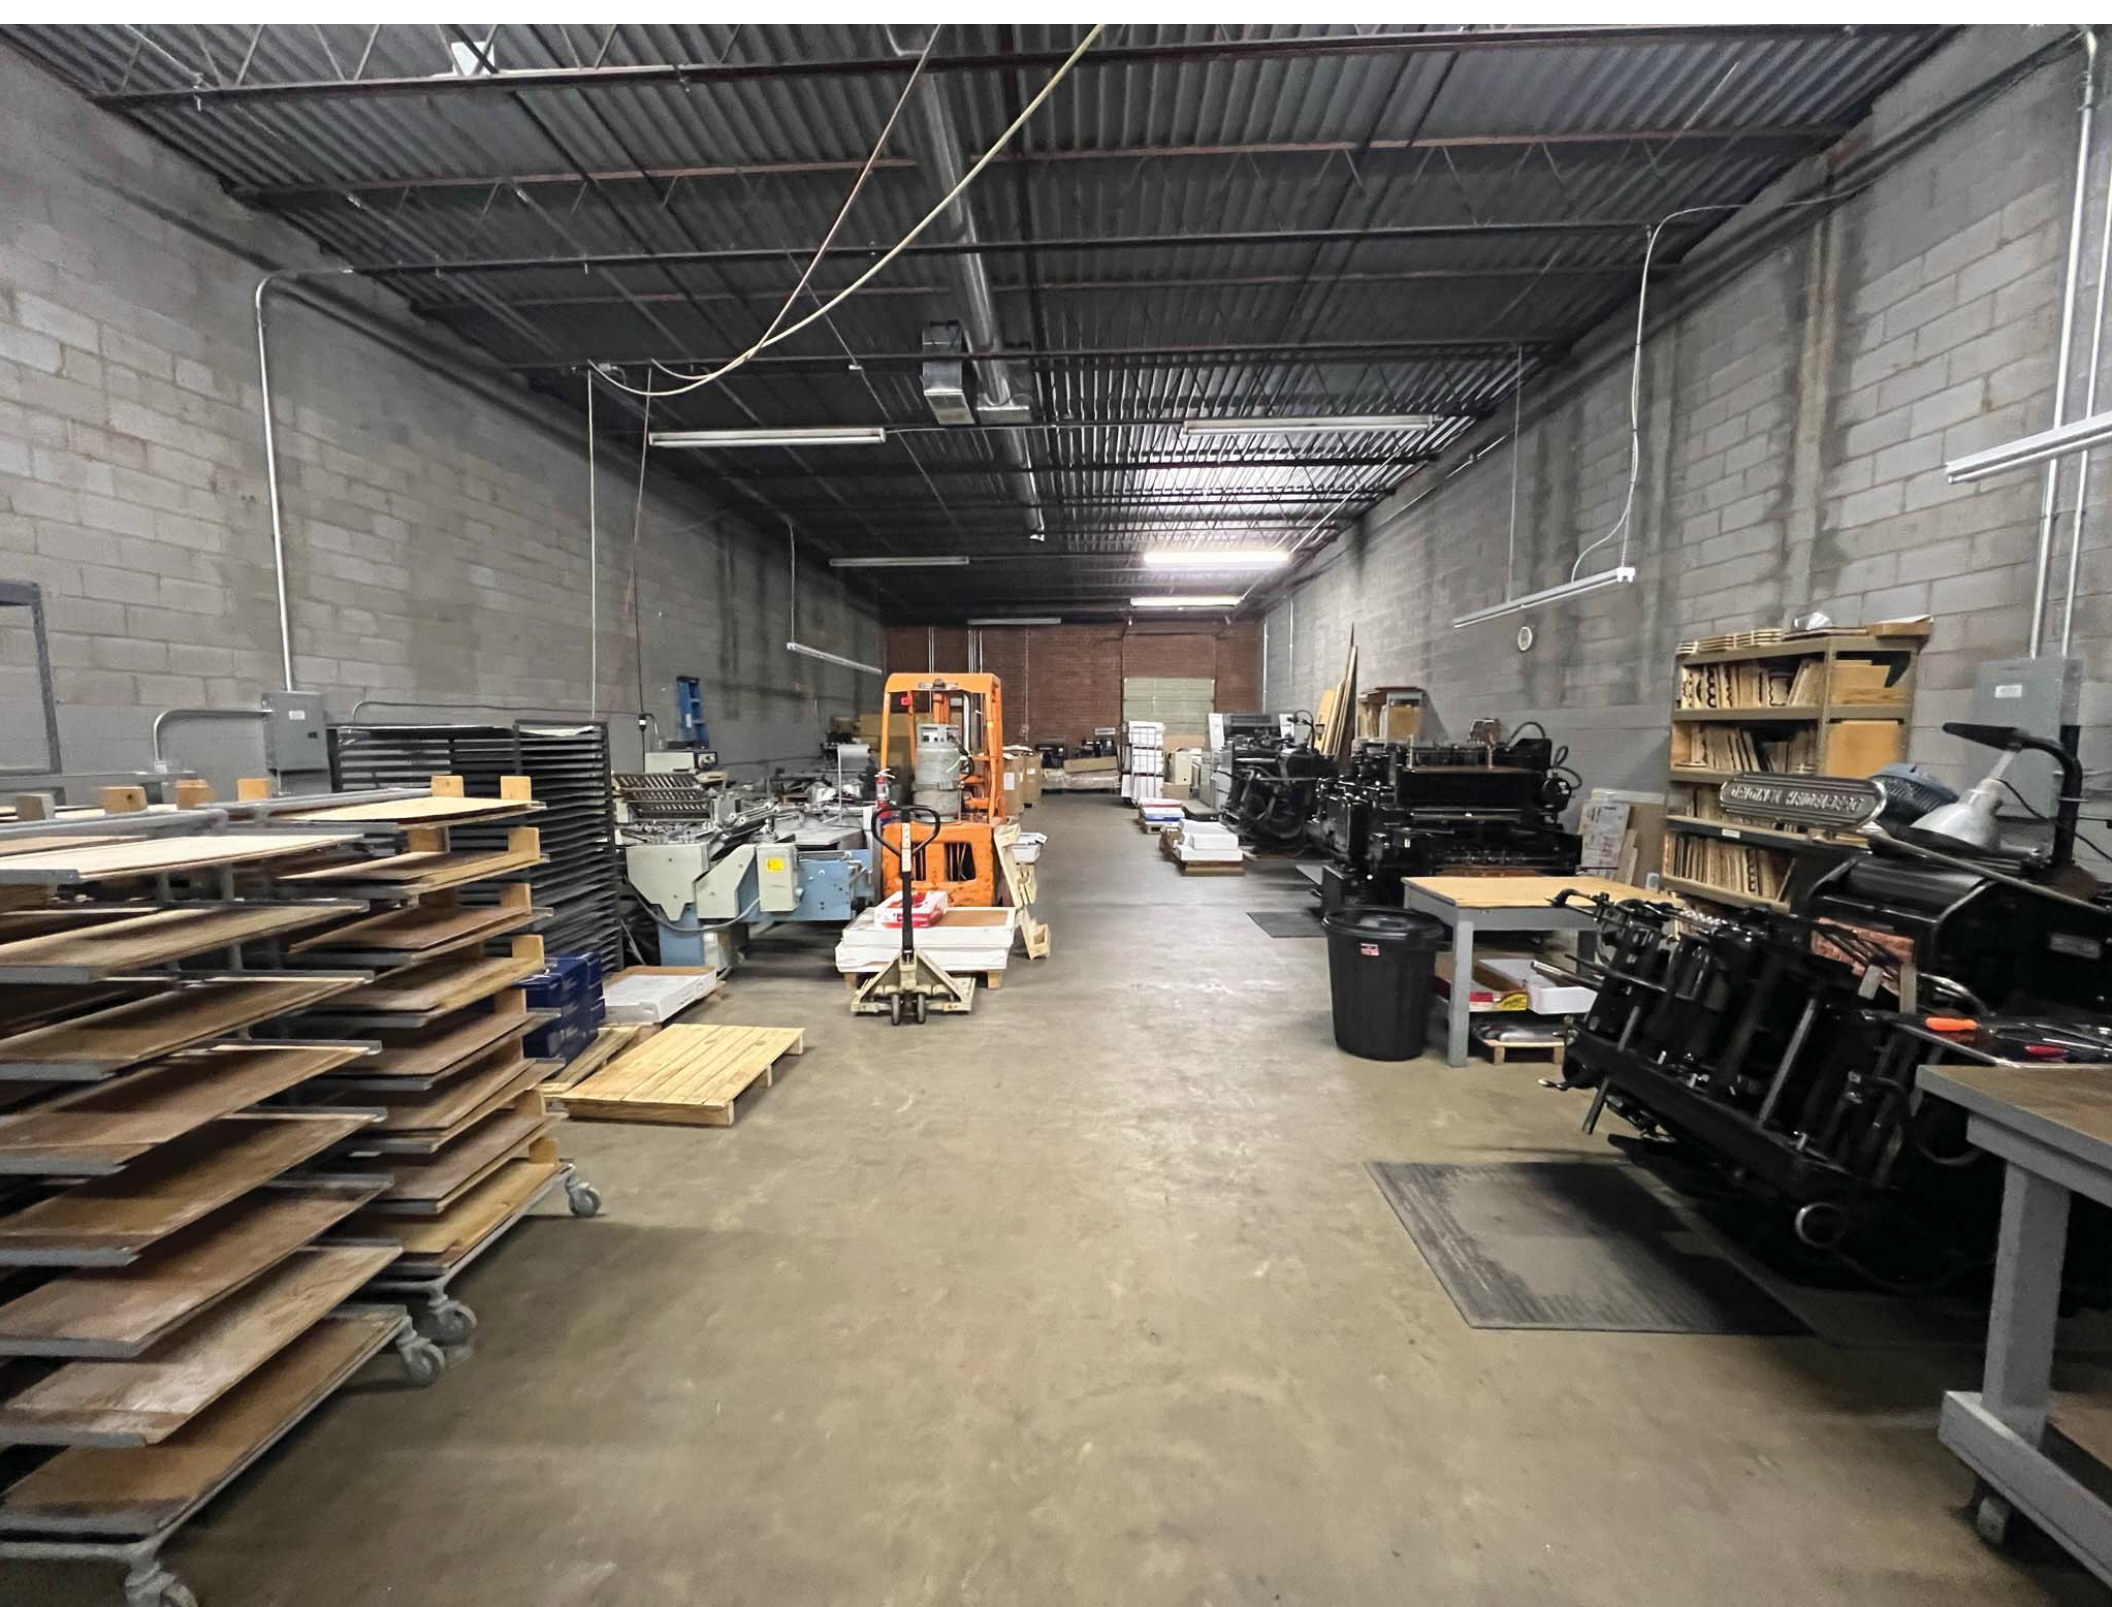




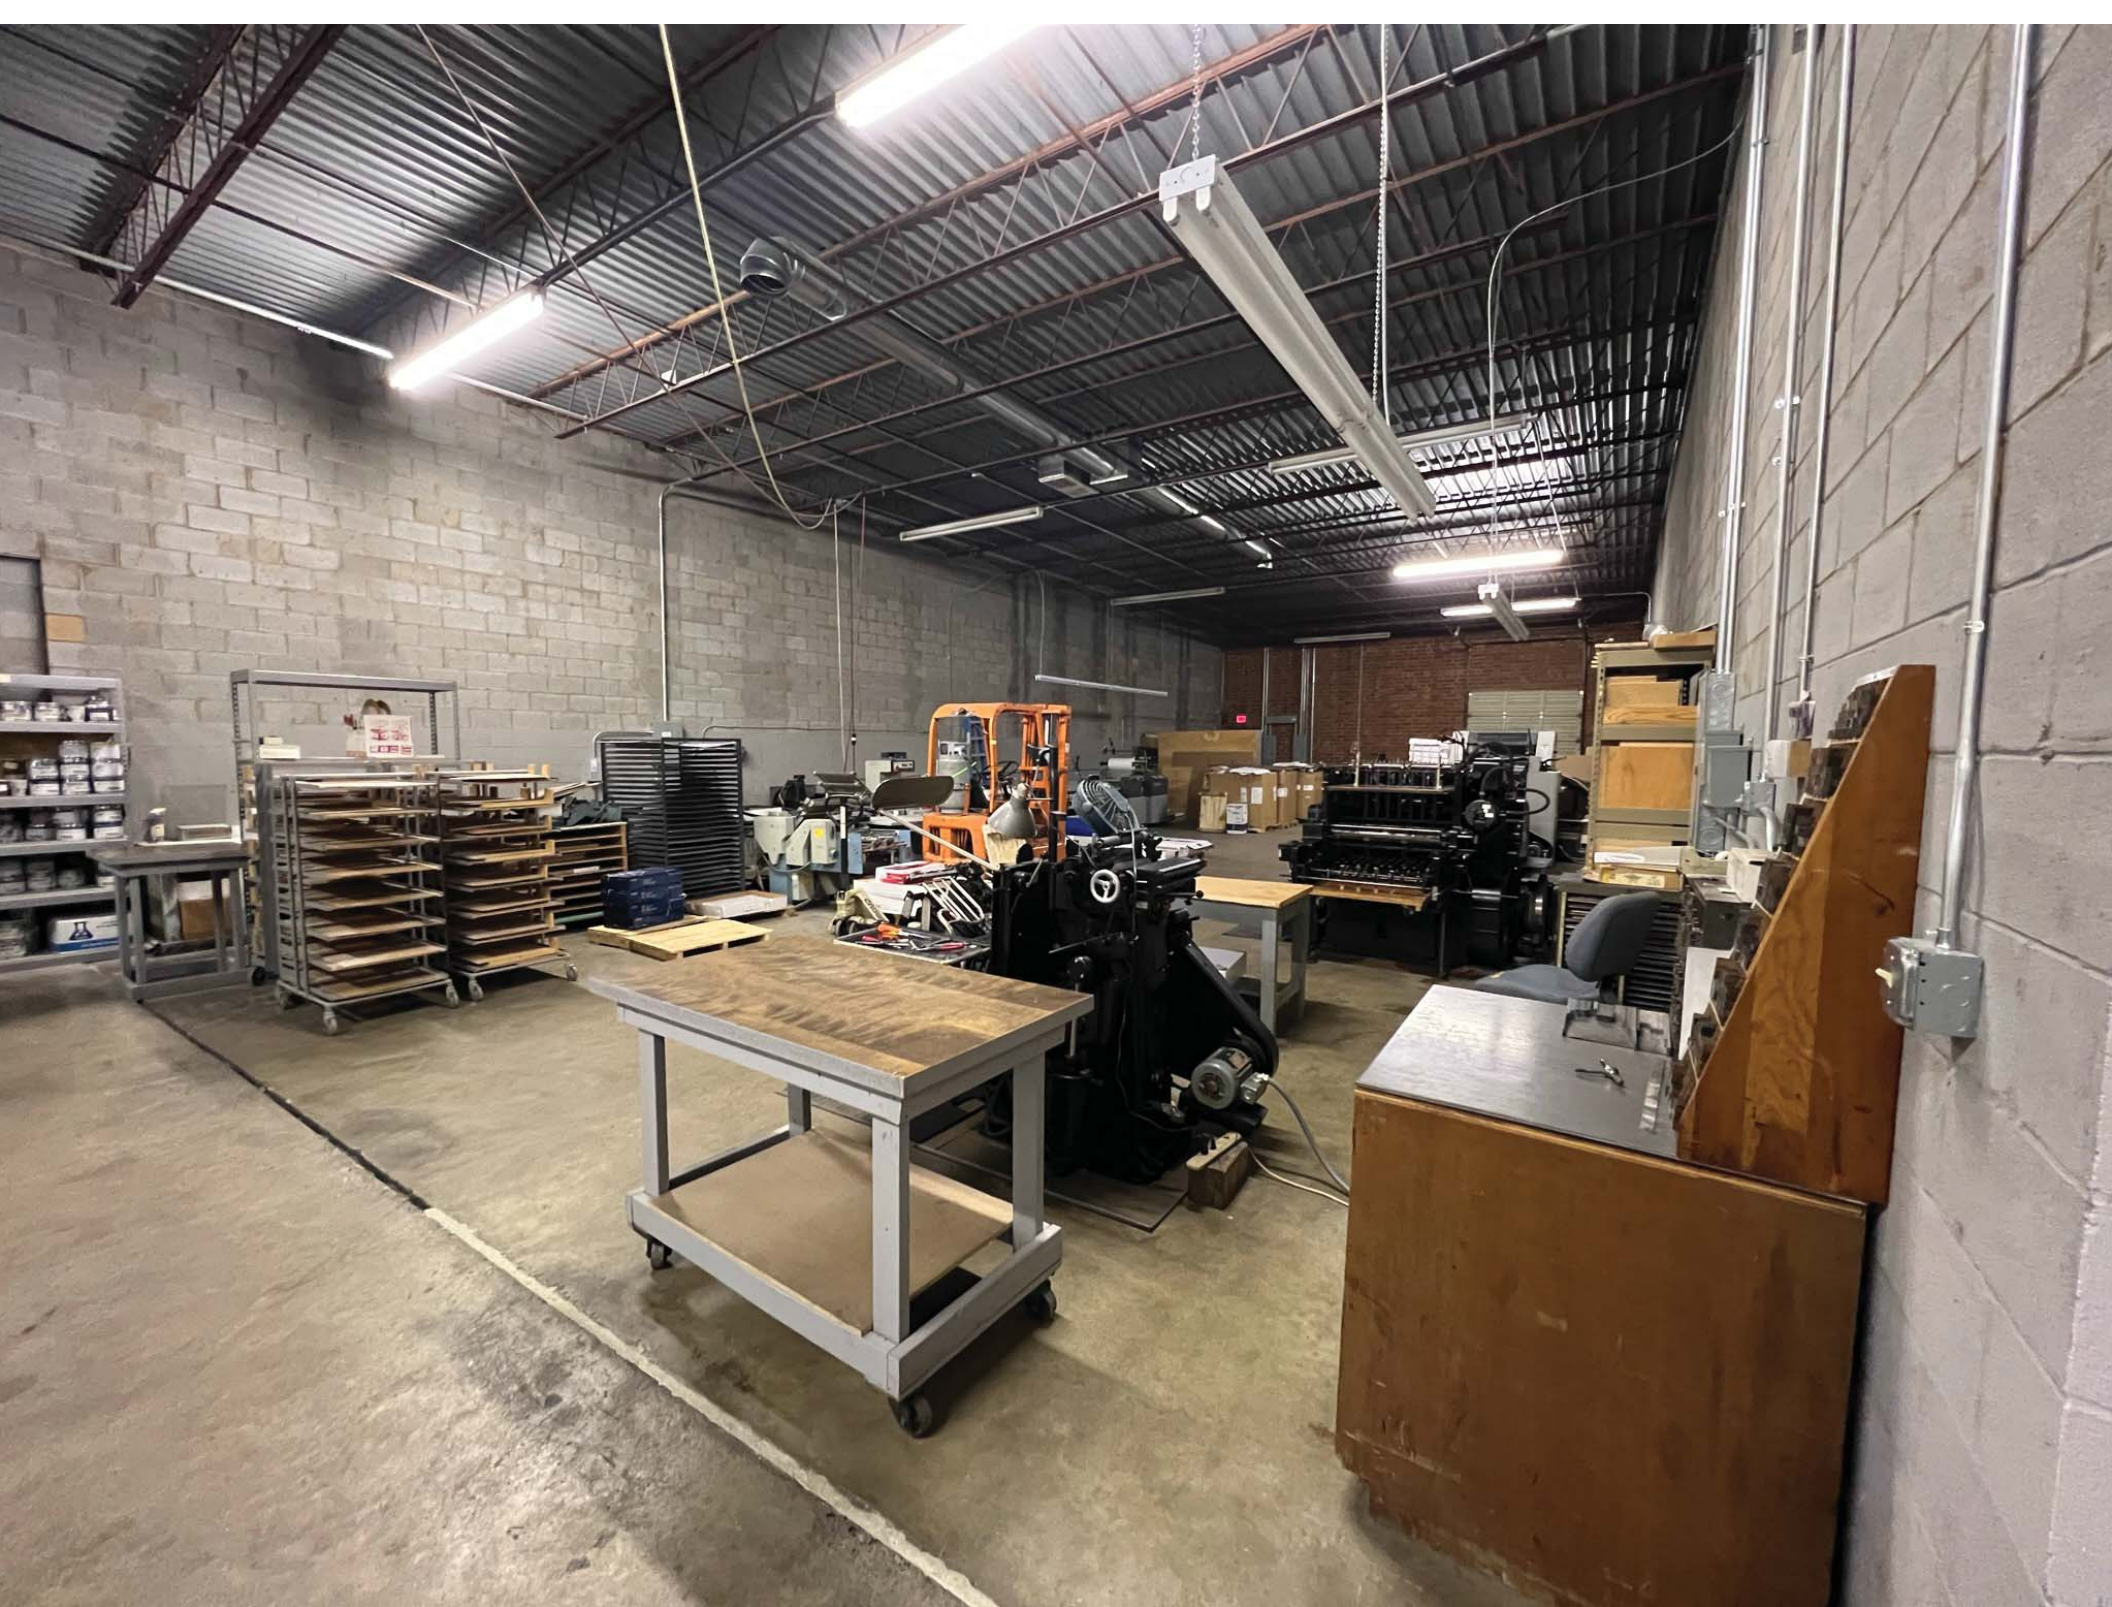







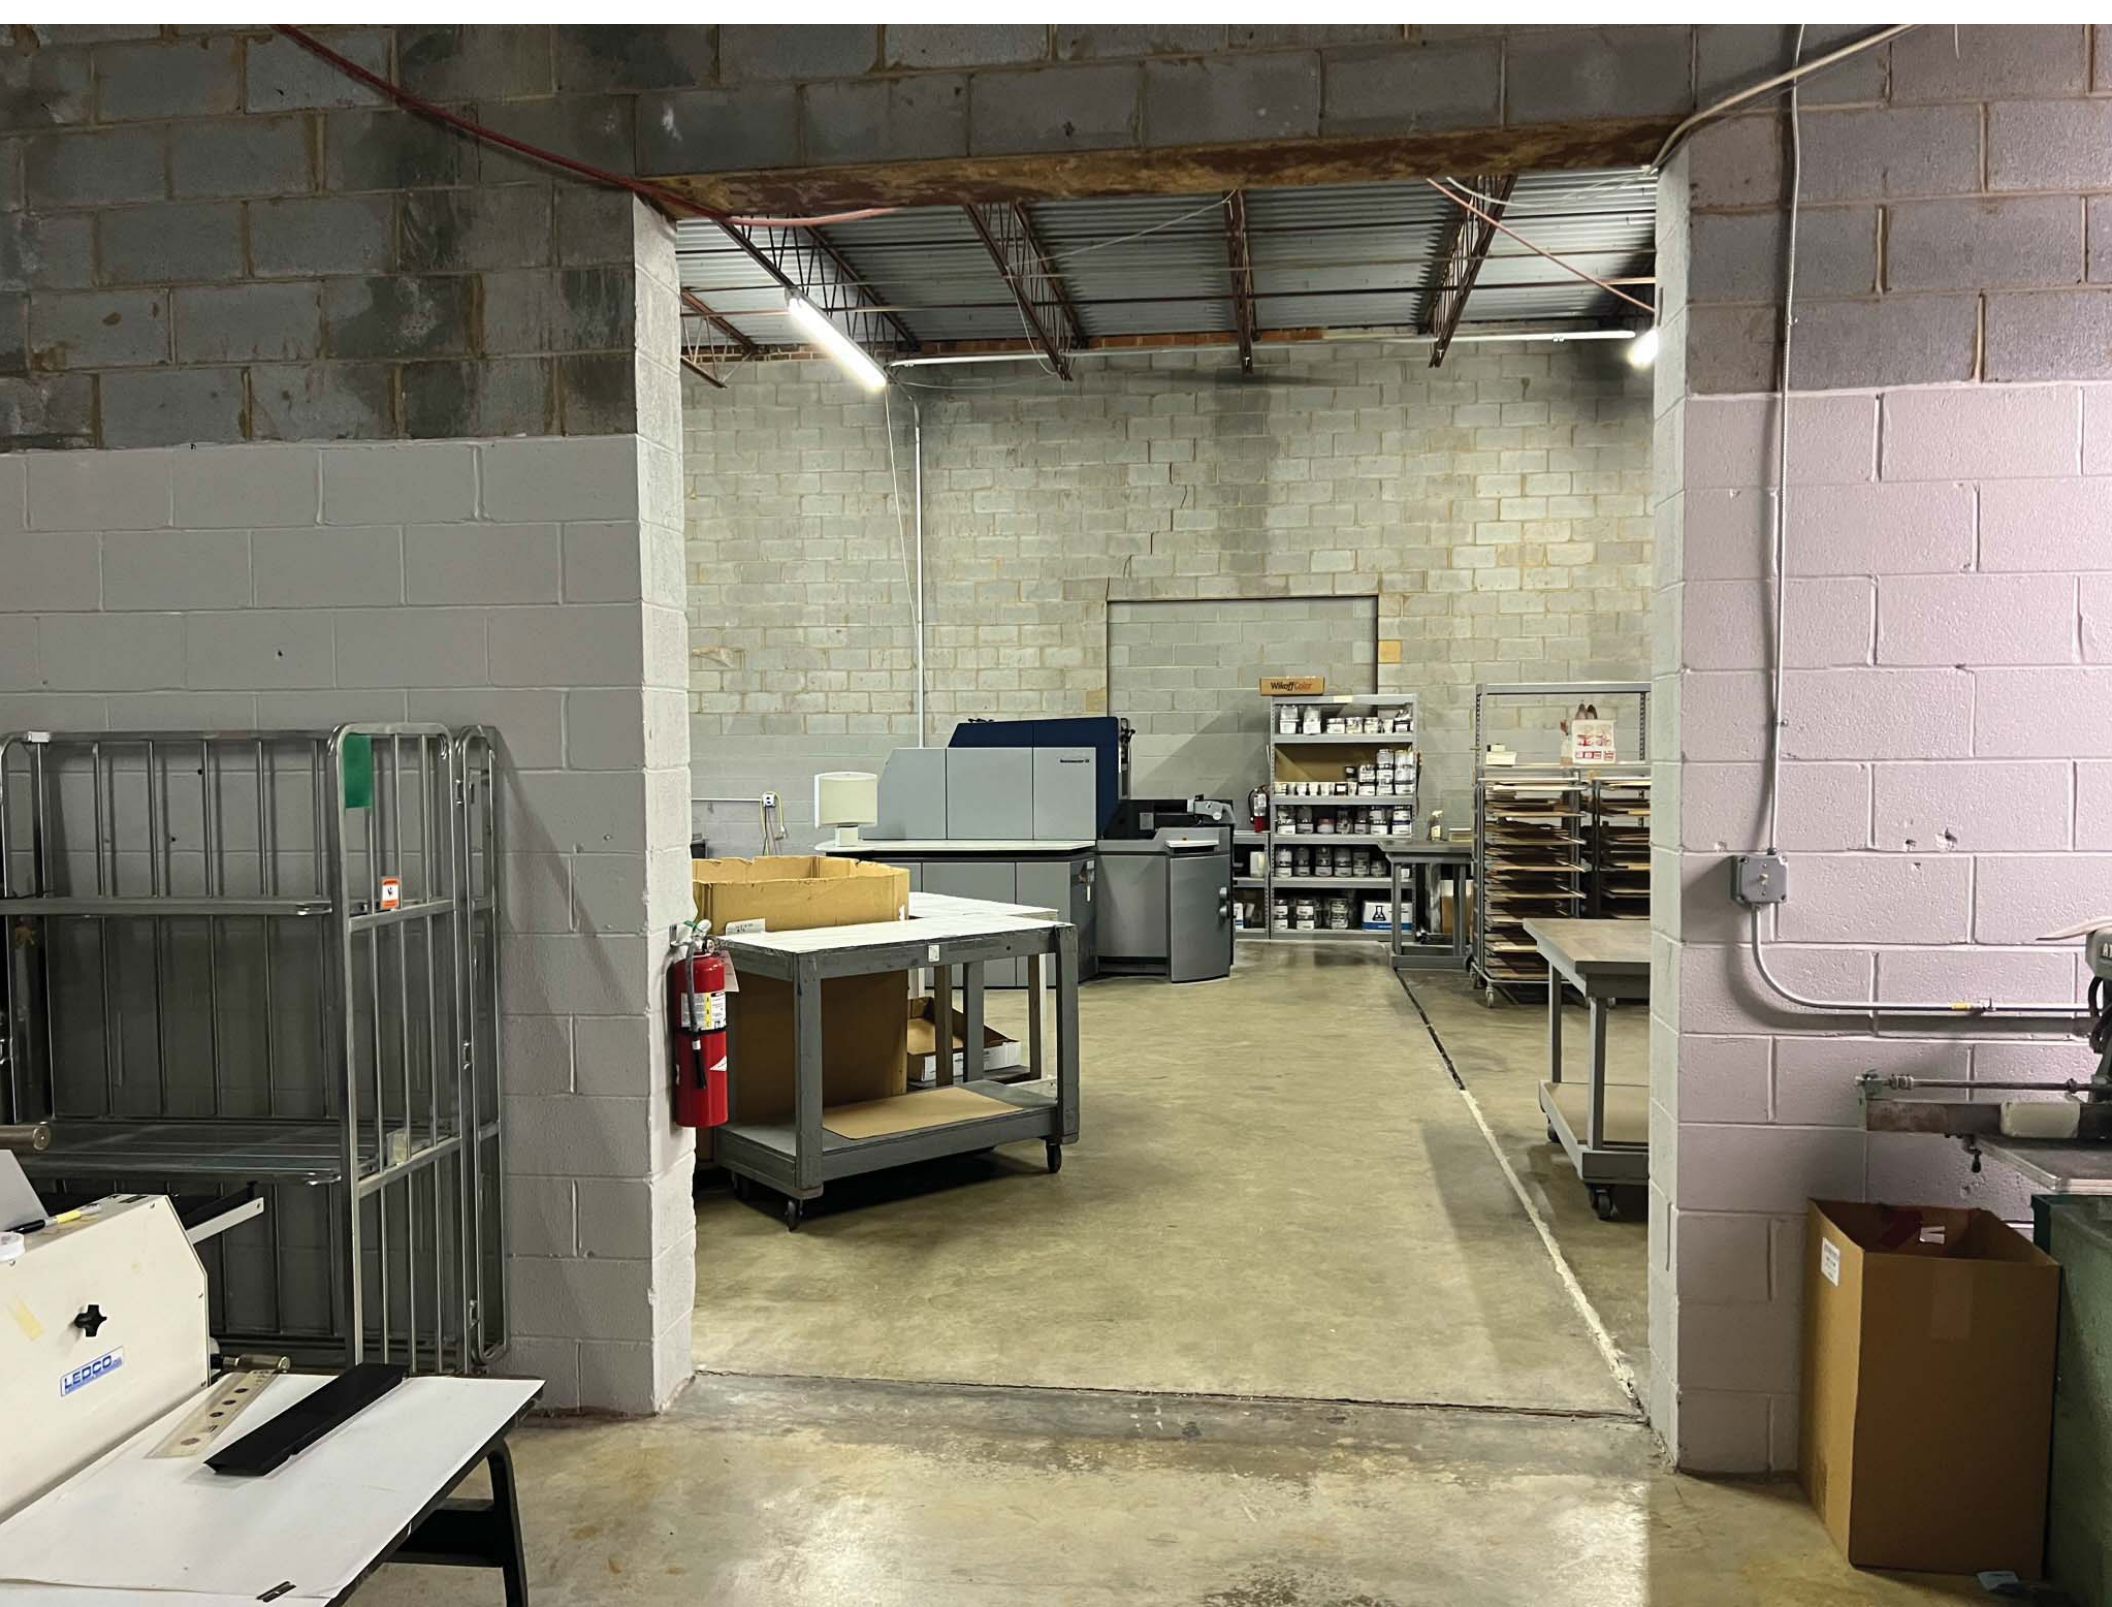














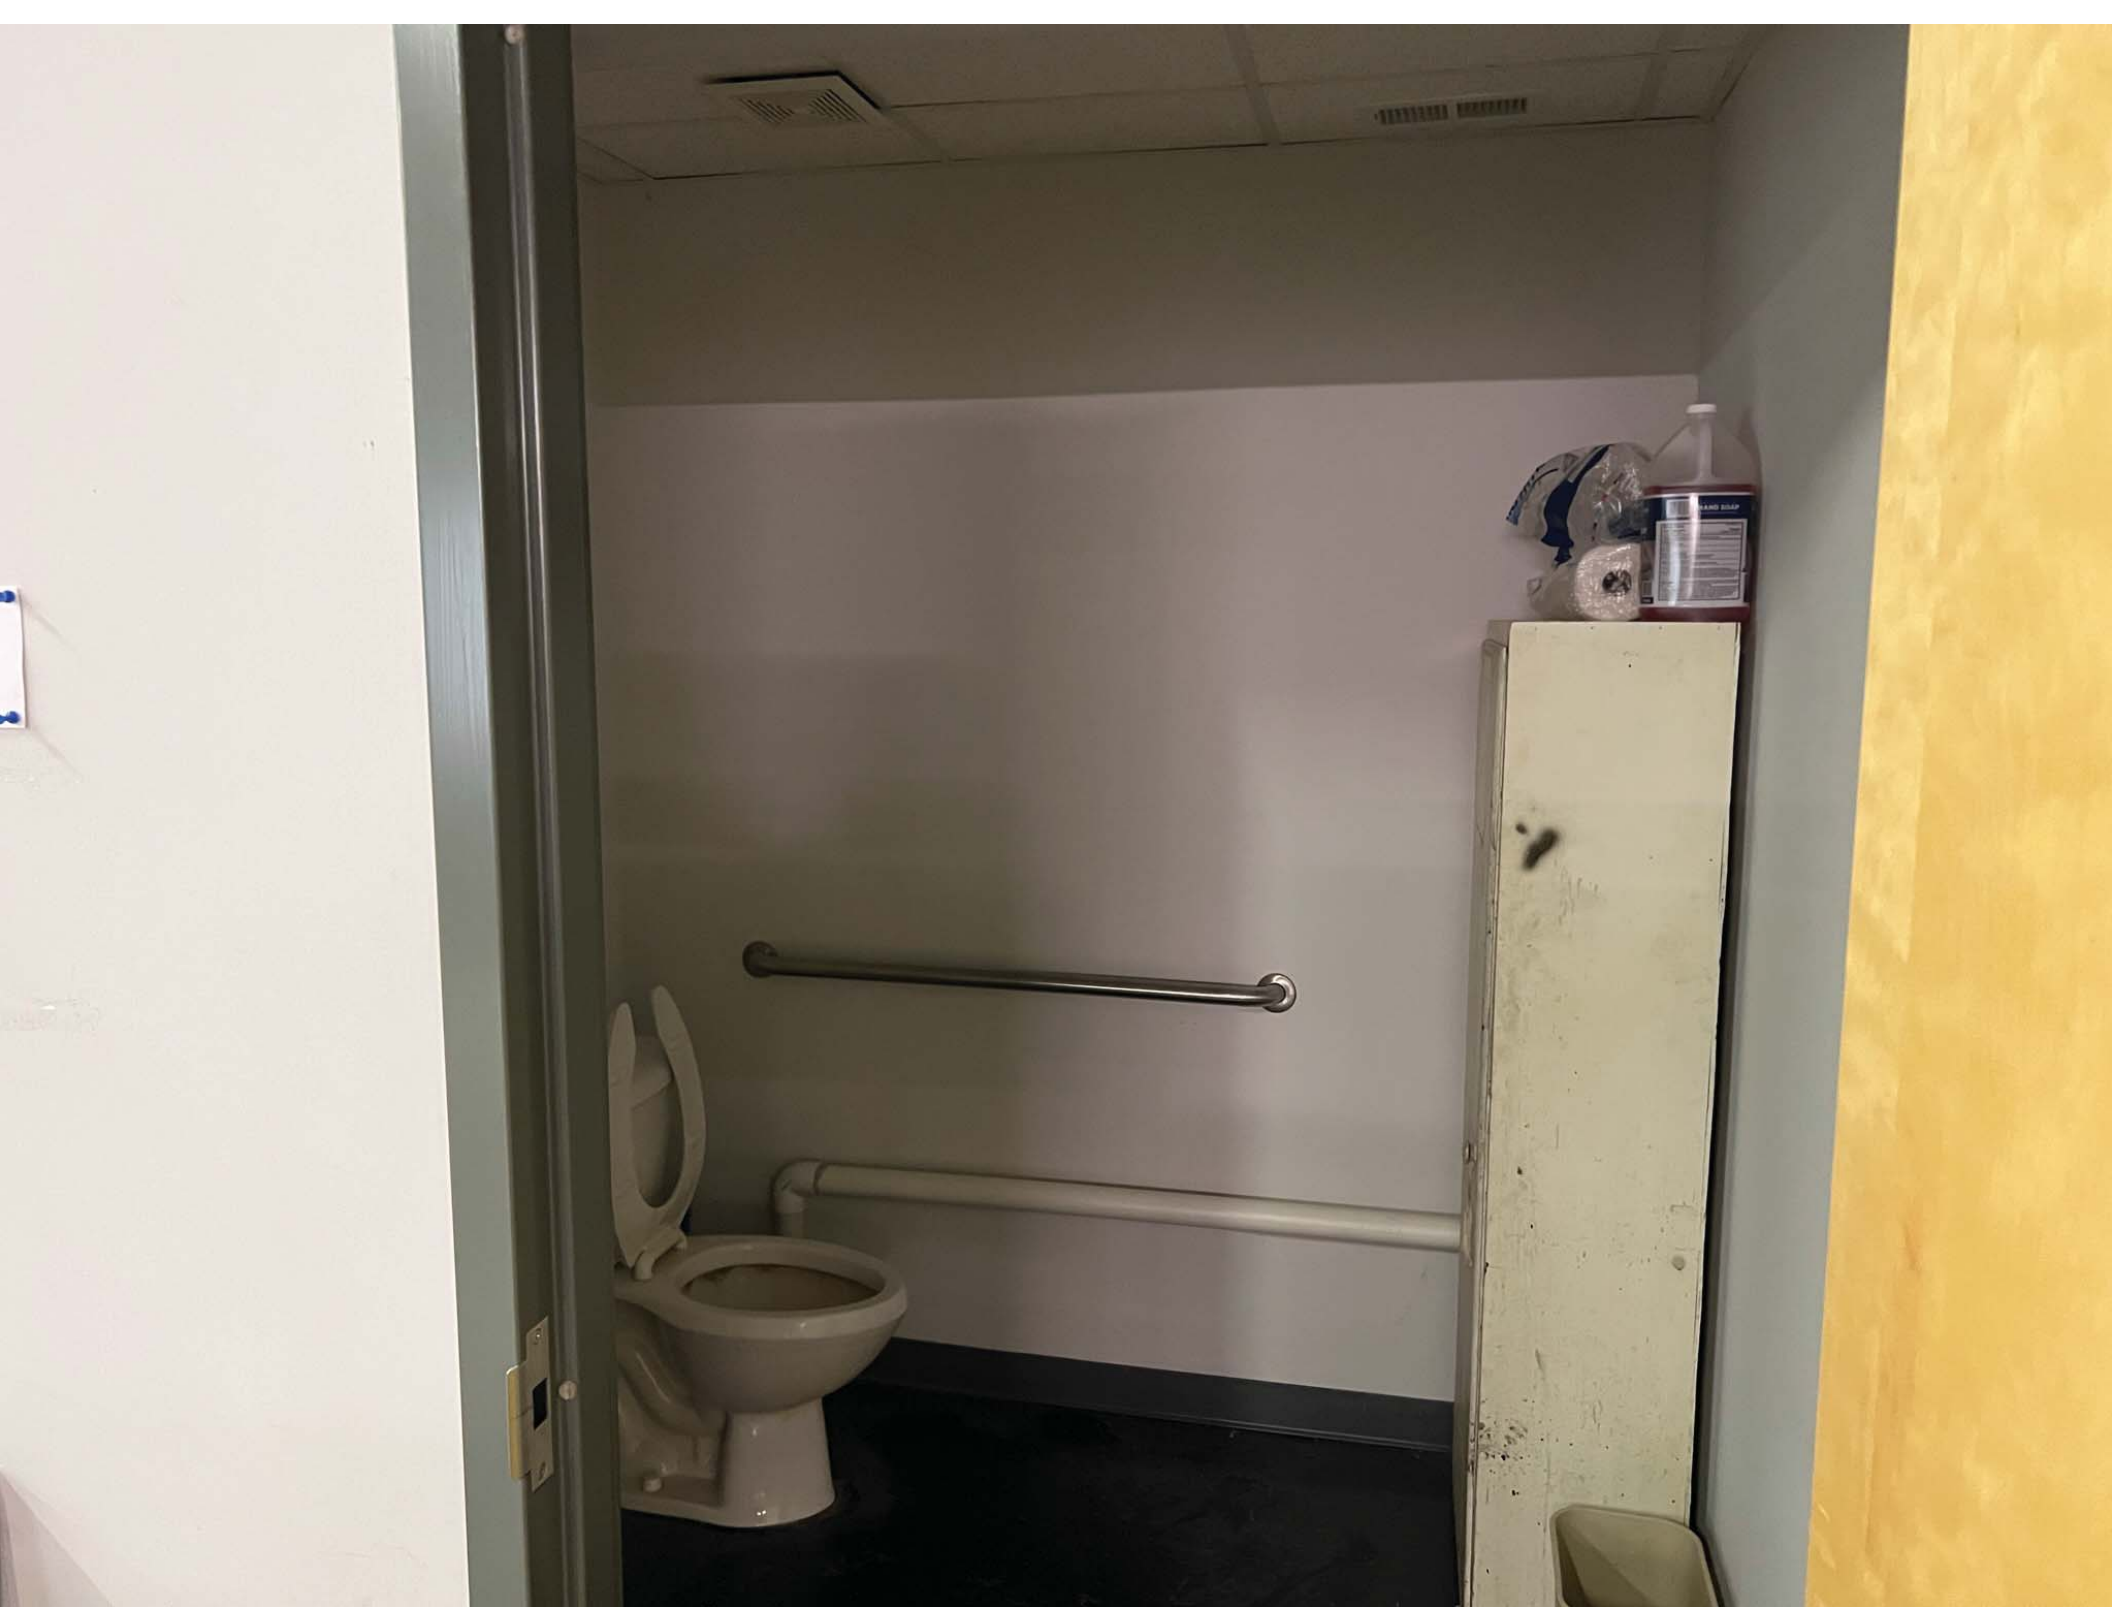



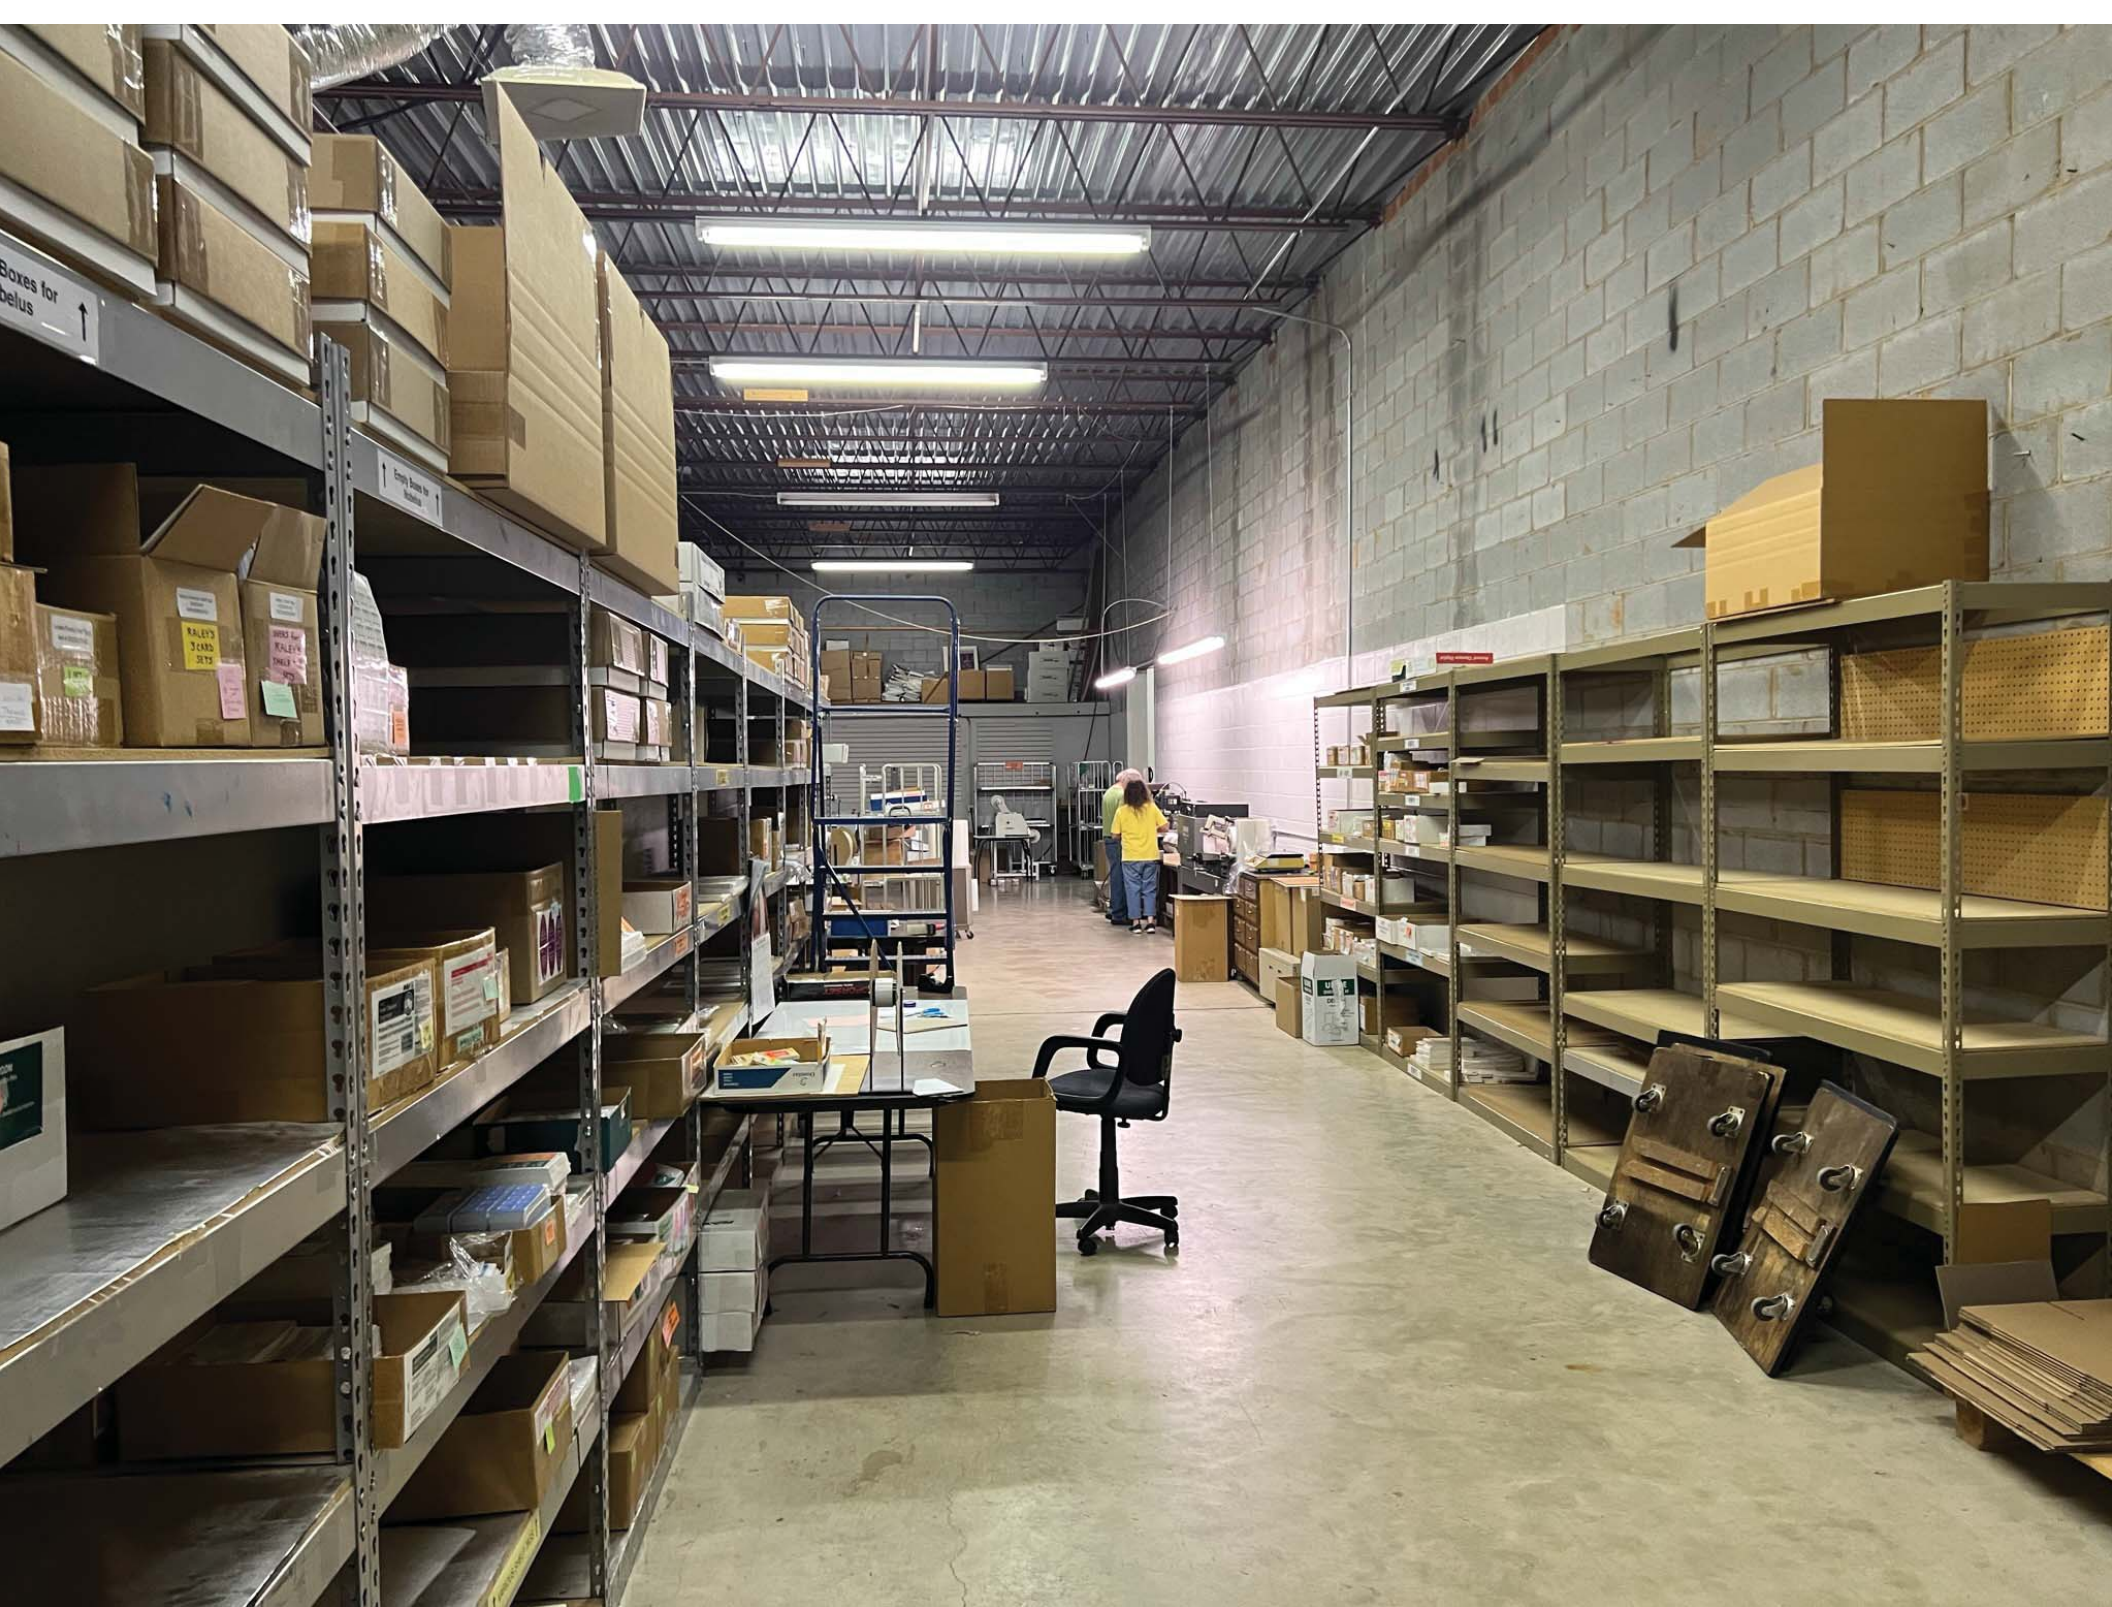



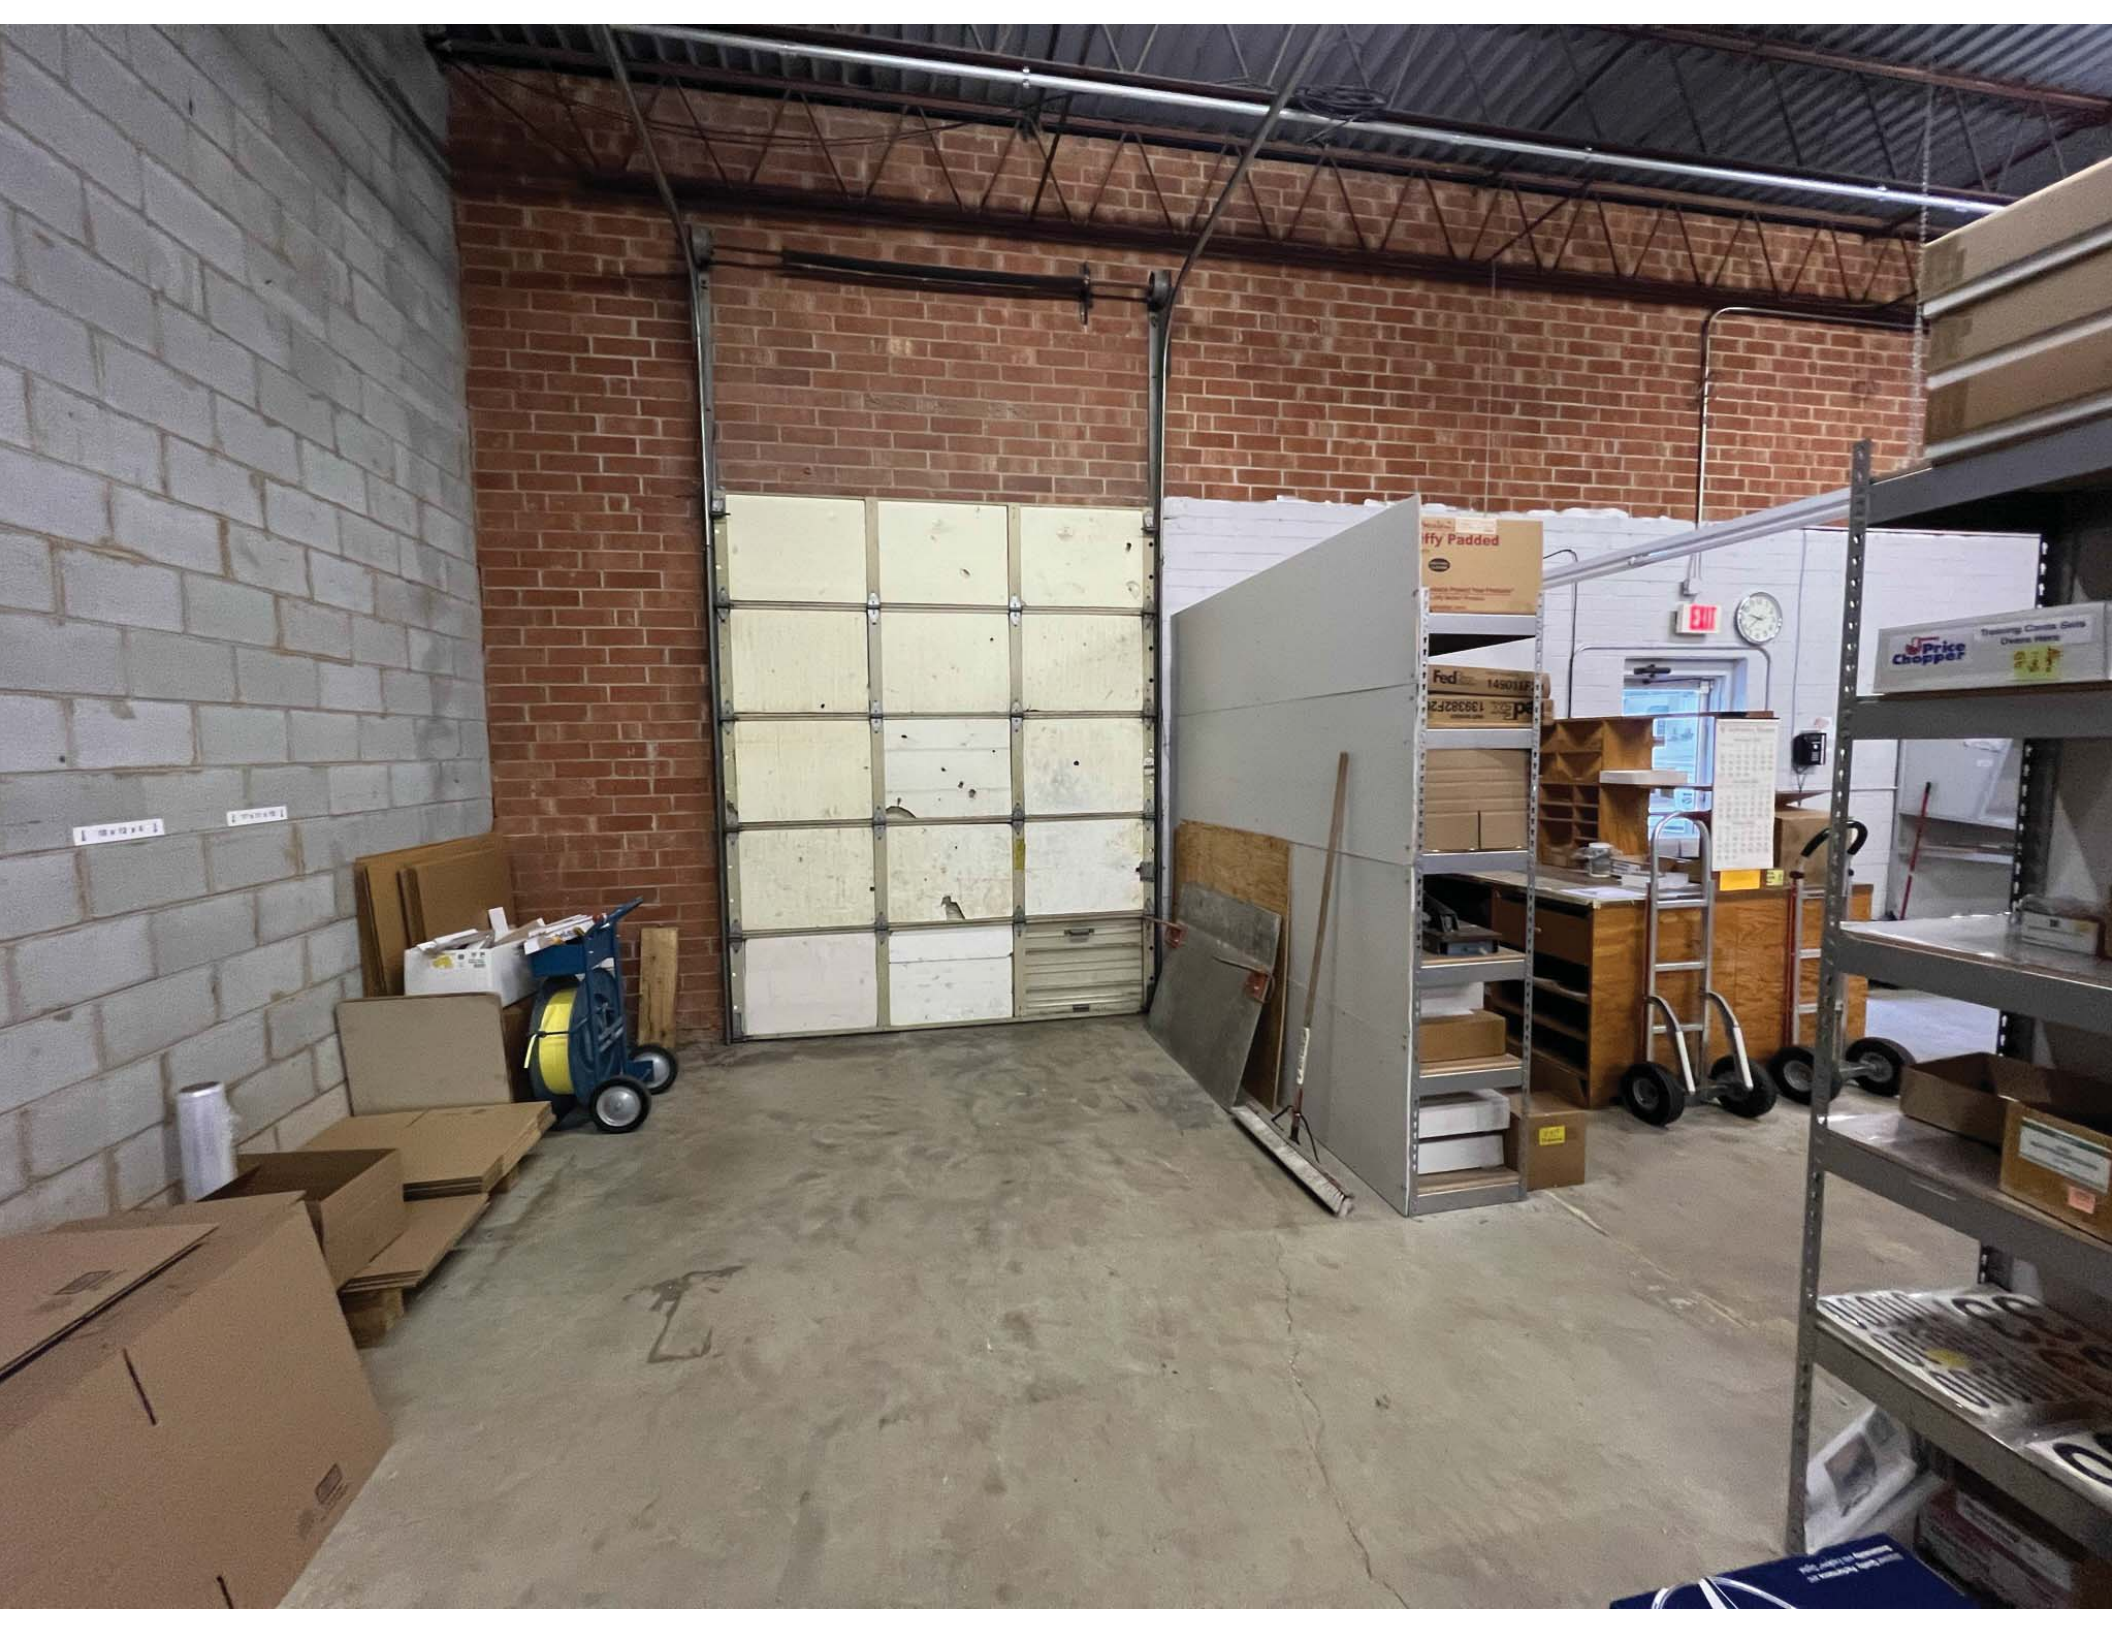

















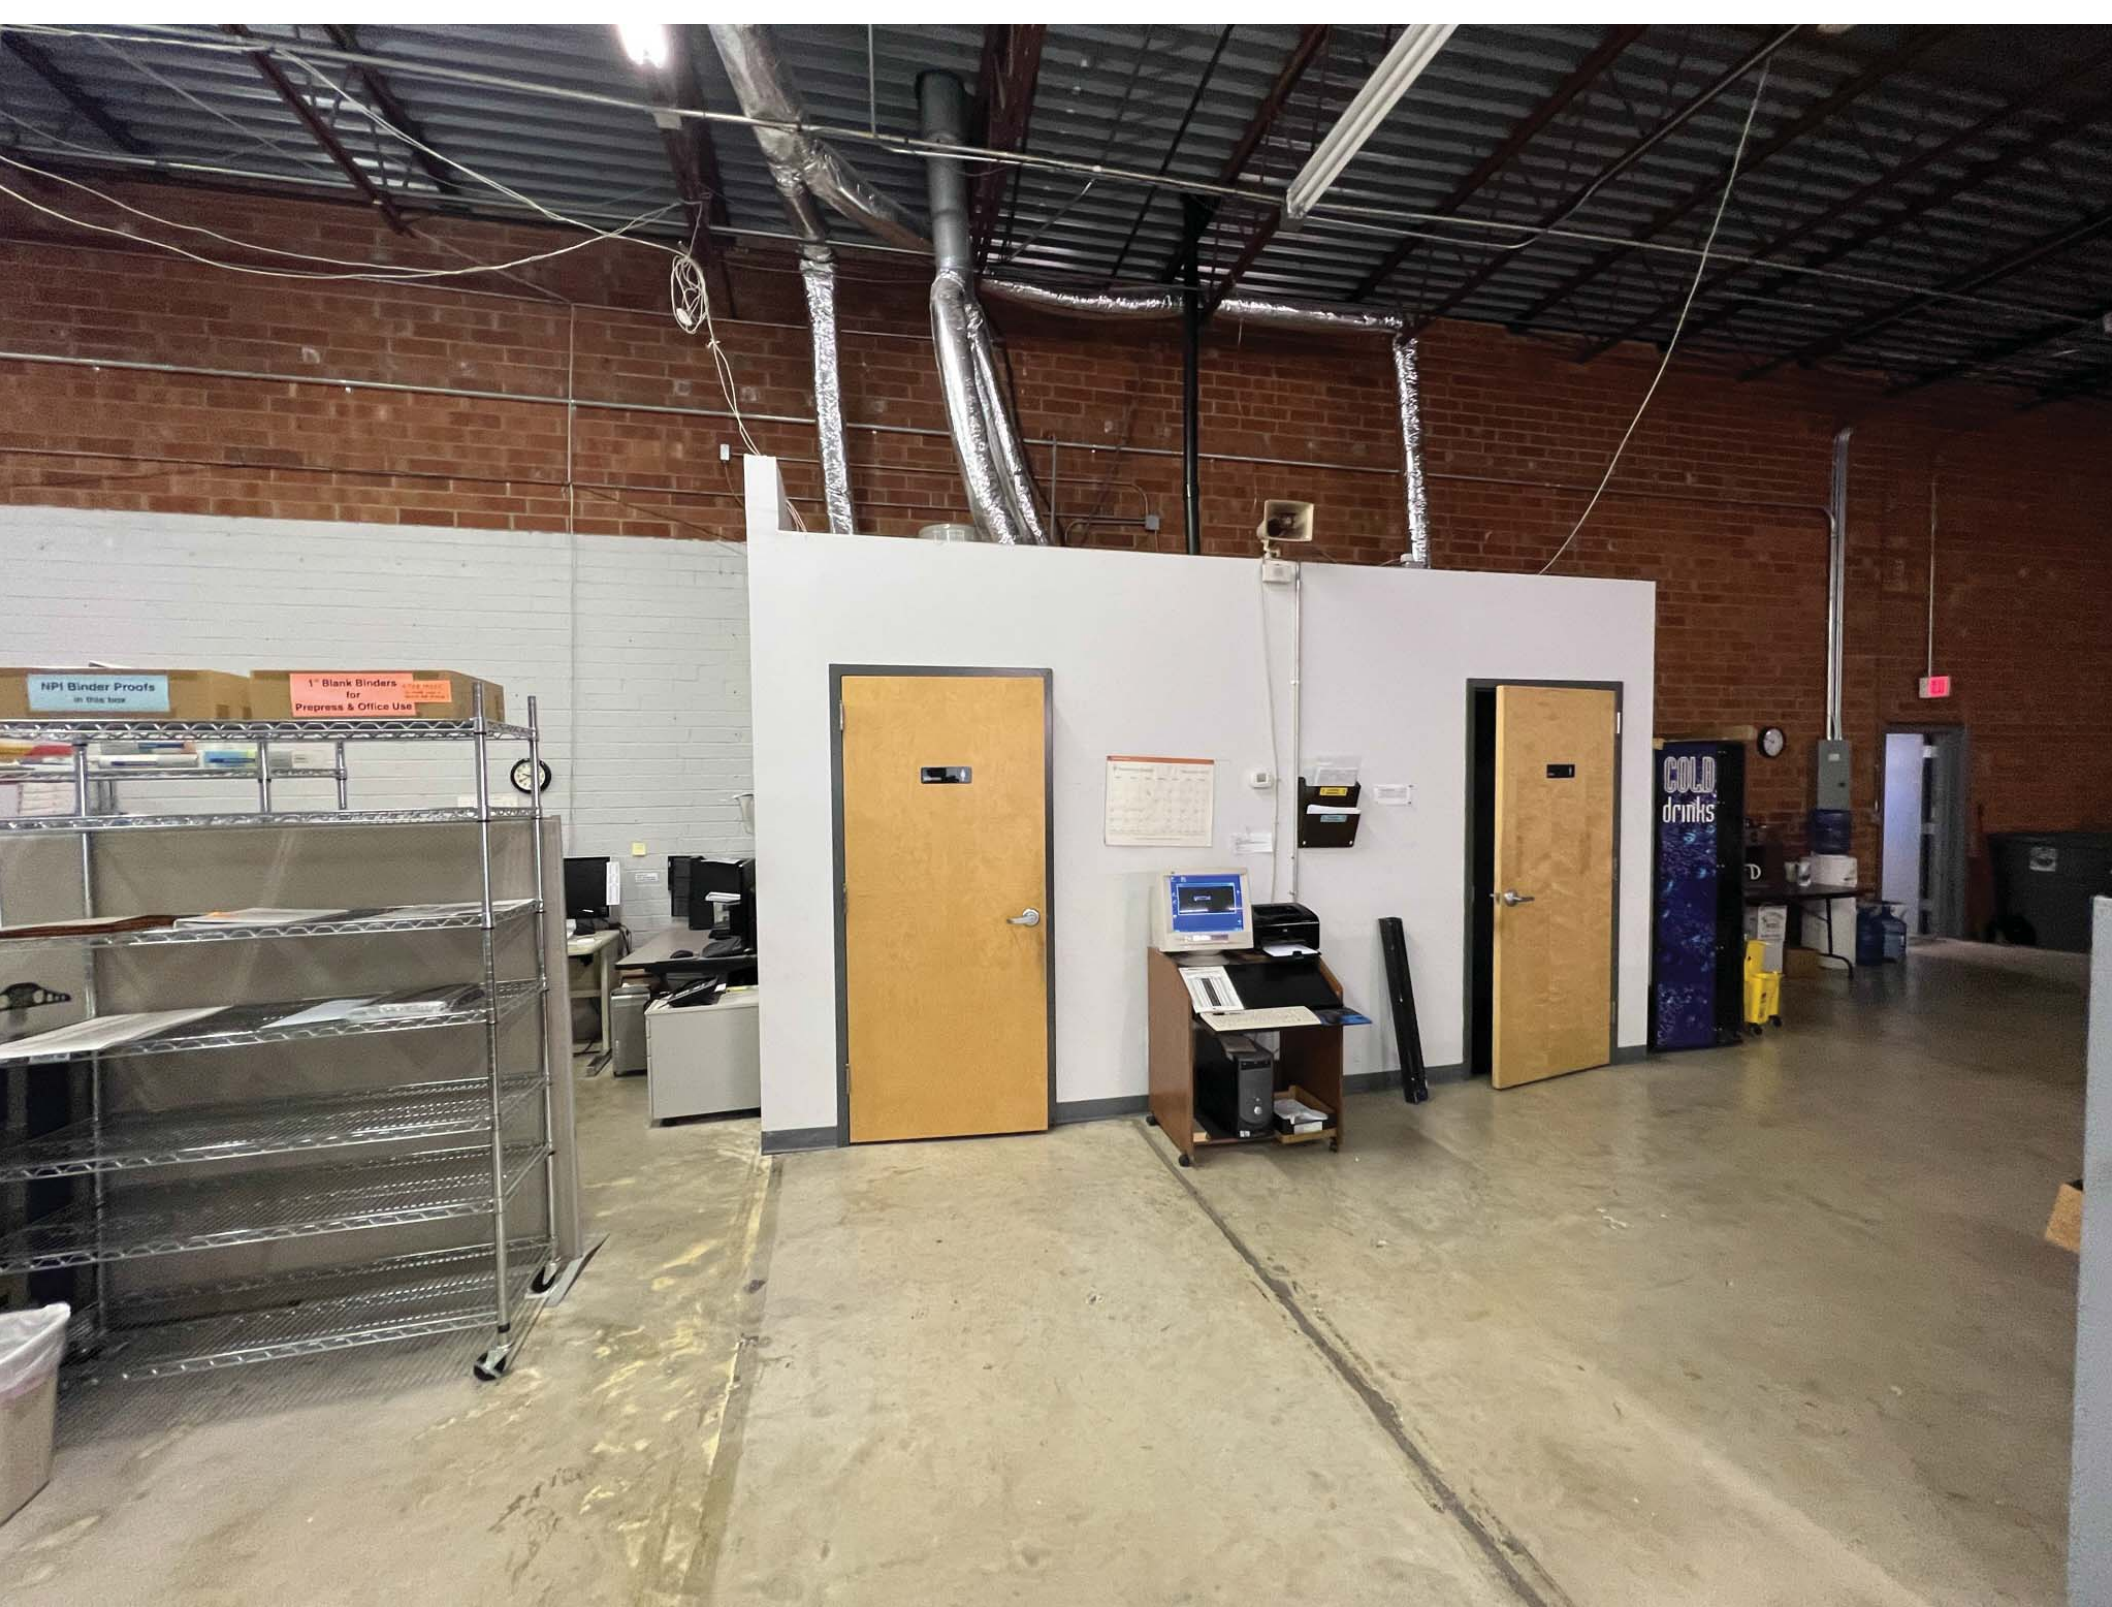







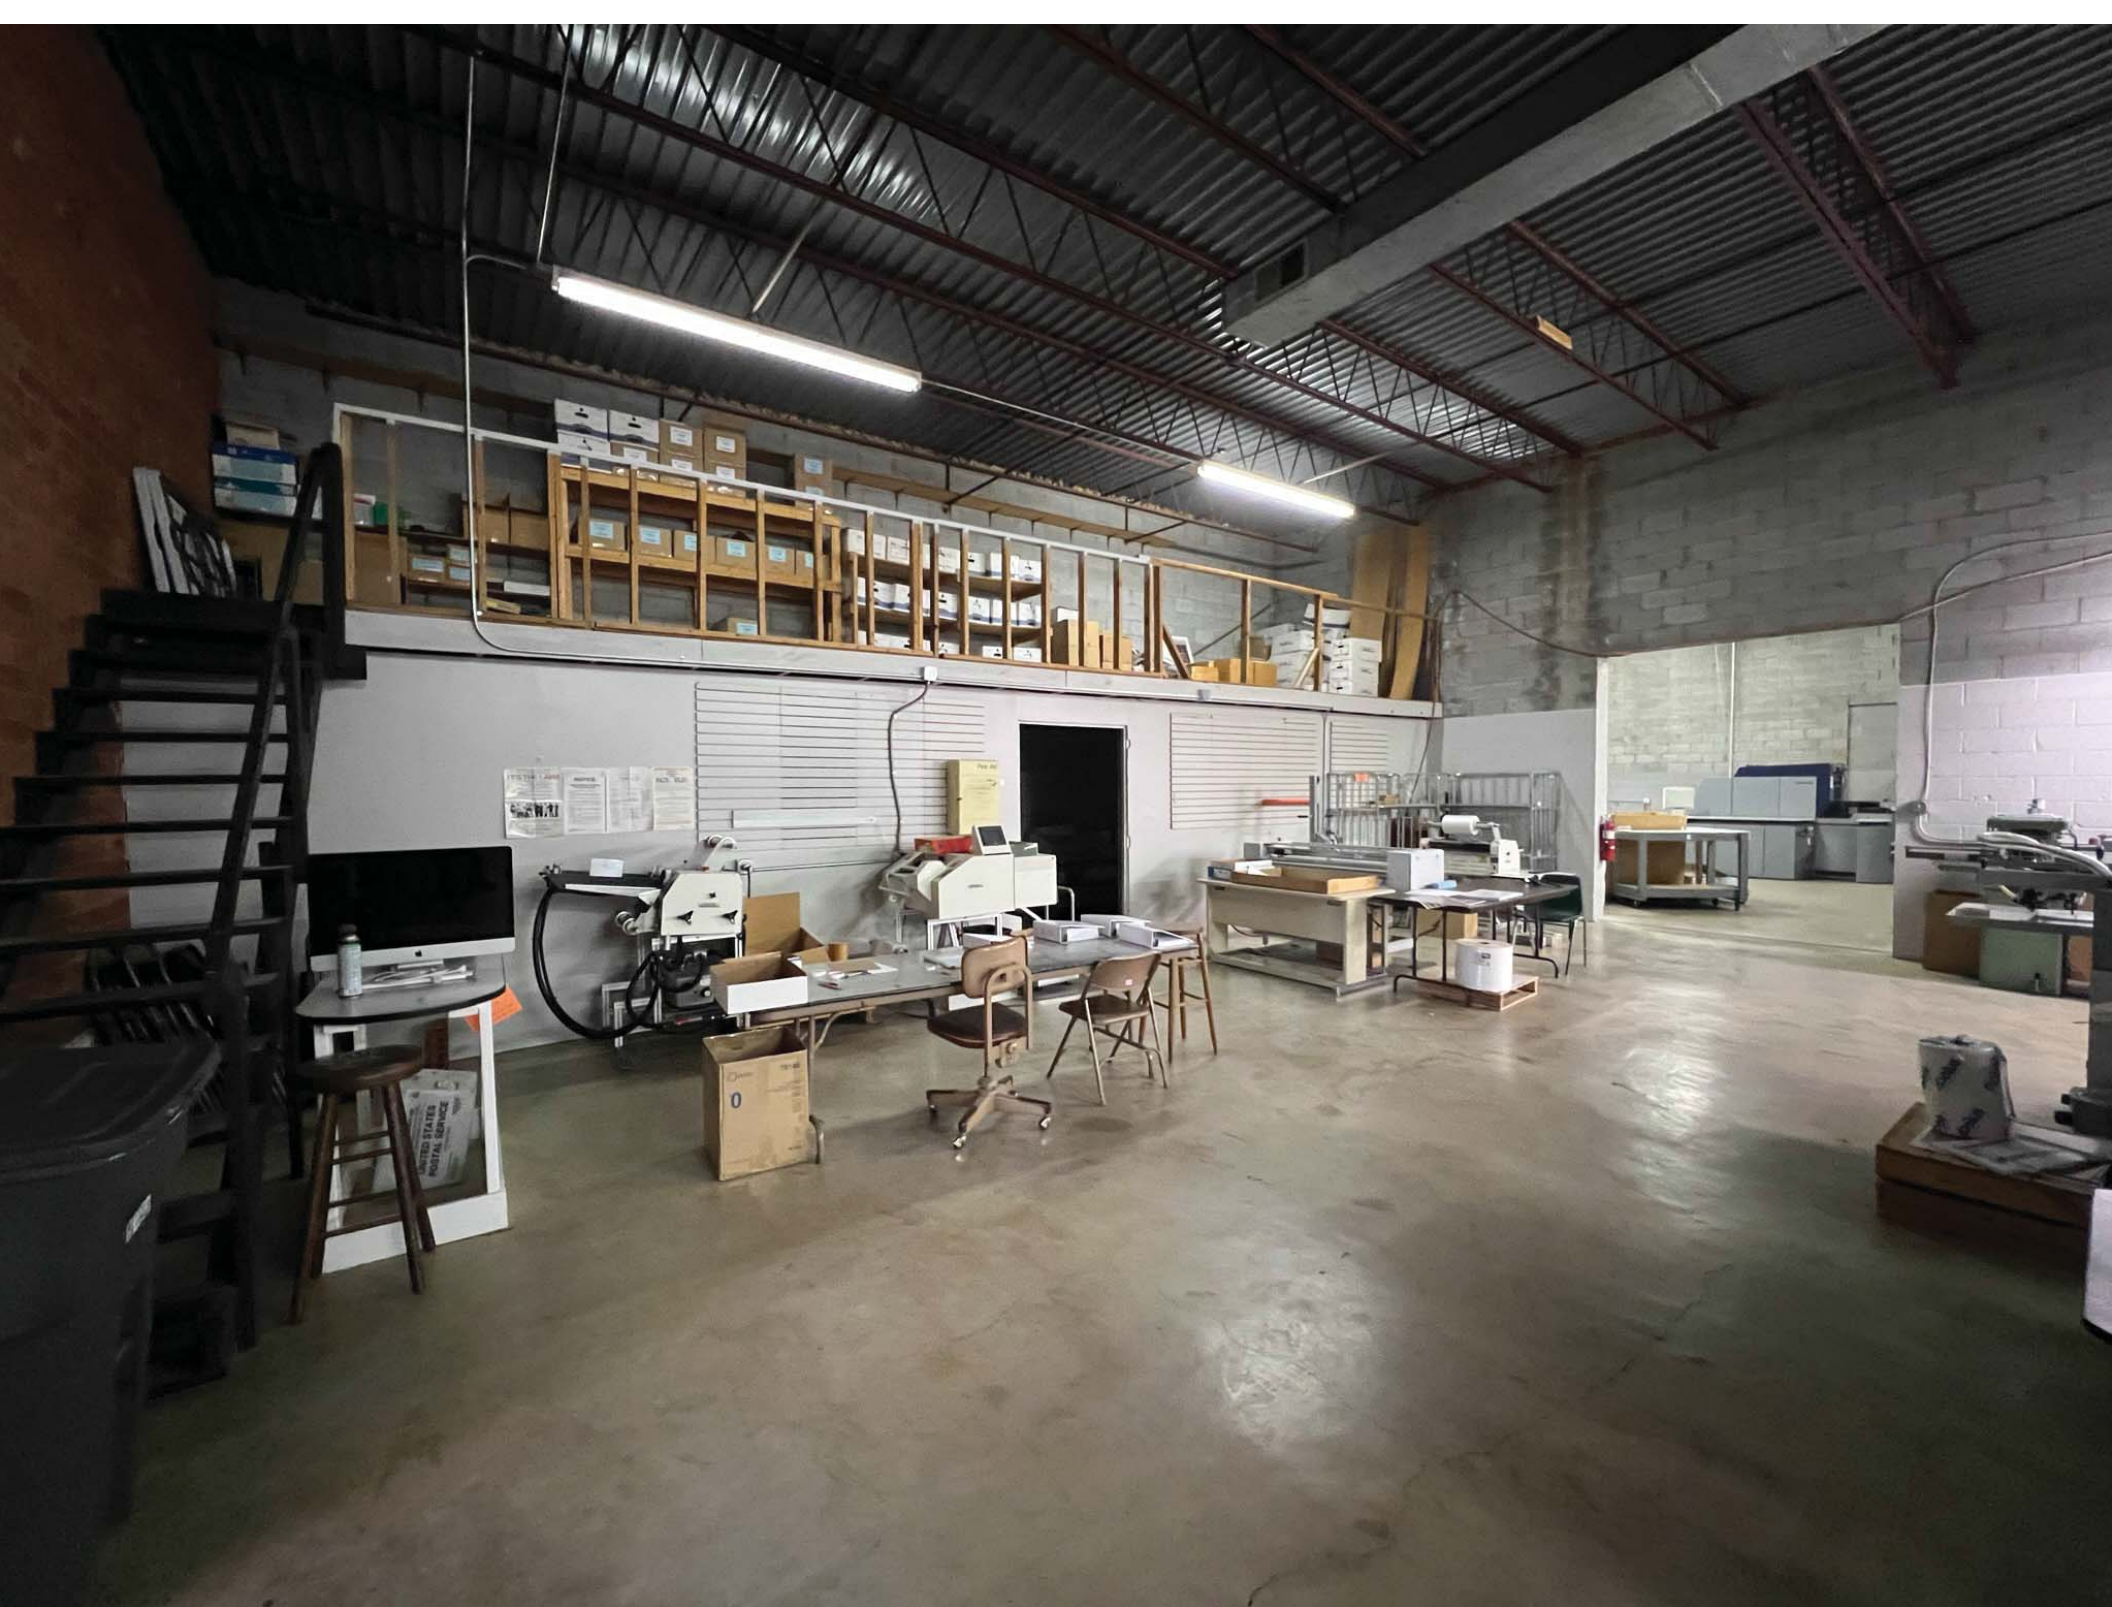







**Site**

